

## SPLIT LOOM TUBING

### Polyethylene Split Loom

Black polyethylene split loom provides wire and cable assemblies with protection from heat and sunlight, water, snow, salt, vibration, wear, fraying or puncture. Split construction allows for easy wire insertion. Maximum temperature 93°C (200°F). Available in many packaging variations to suit all needs.

Techspan's split loom can be used for numerous applications as follows:

- Automotive
- Truck and Trailer
- Bus/R.V.
- Marine & Agricultural Equipment
- Electrical Panels
- Appliances/Electronics

#### Small Packaging – (Rolled neatly in bags)

I.D. Size	10ft Roll	50ft Roll	250ft Roll
1/4"	669870	769870	769871
3/8"	669864	769864	769876
1/2"	669865	769865	769877
5/8"	669873	769873	769872
3/4"	669866	769866	769878
1"	669875	769875	
1-1/4"		769874	769881**
1-1/2"		769879	
2"		769880	

Use loom/tubing cutting tool **WT-1** found on page G-XX.

\*\*769881 is actually a 100ft roll

Also, now available... Flame Retardant Split Loom as well as Non-Split Loom

#### Bulk Packaging – (Continuous Roll in a Box)

I.D. Size	Part No.	Package quantity	Packaging Type
1/4"	769870B	1 x 3200 ft	Box
3/8"	769864B	1 x 1900 ft	Box
1/2"	769865B	1 x 1100 ft	Box
5/8"	769873B	1 x 800 ft	Box
3/4"	769866B	1 x 550 ft	Box
1"	769875B	1 x 300 ft	Box
1-1/4"	769881B	1 x 250 ft	Box
1-1/2"	769881B	1 x 150 ft	Box
2"	769880B	1 x 100 ft	Box

Use loom/tubing cutting tool **WT-1** found on page G-XX.

Also, now available... Flame Retardant Split Loom as well as Non-Split Loom

**For quick & easy installation, use our NEW Split Loom Installation Tool found on the next page**



### Nylon (high Temperature) Split Loom

Nylon split loom has a temperature rating of 149°C (300°F) suitable for engine compartments. Identified by its grey stripe.

I.D. Size	Part No.	Package quantity	Packaging Type
1/4"	769901	1 x 50 ft	Bag
1/4"	769901B	1 x 3200 ft	Box
3/8"	769902	1 x 50 ft	Bag
3/8"	769902B	1 x 1900 ft	Box
1/2"	769903	1 x 50 ft	Bag
1/2"	769903B	1 x 1100 ft	Box
5/8"	769904	1 x 50 ft	Bag
5/8"	769904B	1 x 800 ft	Box
3/4"	769905	1 x 50 ft	Bag
3/4"	769905B	1 x 550 ft	Box
1"	769906	1 x 50 ft	Bag
1"	769906B	1 x 300 ft	Box
1-1/4"	769907B	1 x 250 ft	Box
1-1/2"	769908B	1 x 150 ft	Box
2"	769910B	1 x 100 ft	Box


Use loom/tubing cutting tool **WT-1** found on page G-XX.

Also, now available... Flame Retardant Split Loom as well as Non-Split Loom



Now available... Split Loom in 10ft lengths

Polyethylene Split Loom Applications

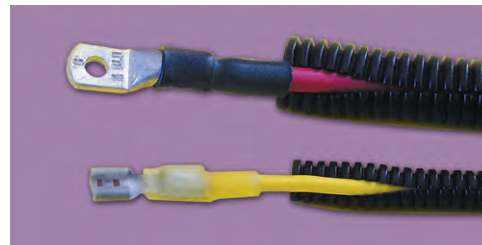

Polyethylene Split Loom Applications



Split Loom Packaging – 50ft Pack



Polyethylene Split Loom – Bulk Box



Nylon Split Loom... For Applications up to 149°C (300°F)

Nylon (High Temperature) Split Loom