

PRIMEX

MANUFACTURING



**Supplier to the
Telecommunications Industry**

For the Shape of Things to Come

Company Profile

The Company



More than 30 years since its beginnings, PRIMEX continues to be a leader in the fields of plastic injection molding and product design. Primex offers a full scope of products and services to meet the ever changing needs of both the Telephone and Broadband industries. Primex is well known for its ability to provide innovative solutions to even the most complex design issues.

Primex manufacturing strives to better meet the needs of the global marketplace. Currently, our plastic injection molding capabilities are supported by state of the art injection molding machines that range in clamping force from 25 to 550 tonnes.

Primex's commitment to maintaining the highest standards in everything it does has earned it its reputation for quality, reliability, innovation and above all, customer service.

OEM & Custom Capabilities

Primex's commitment to exceptional customer service and product quality is complemented by our product design team and is available for consultation on new product ideas.

Our design team will offer support and services from product concept to product completion.

Please contact Primex's sales department regarding any OEM inquiries. An Account Manager will be happy to discuss your specific product needs.



Location & Contact Info

Table of Contents

| | |
|--|-------|
| Outdoor Enclosures | |
| Feature Products..... | 4-5 |
| NID Housings..... | 6-7 |
| Weatherproof Enclosures | 8-12 |
| Broadband Housings..... | 13 |
| Indoor Enclosures | |
| RB8P..... | 14 |
| Modular Jacks | 15 |
| Enclosure Accessories | |
| Protectors & Termination Blocks | 16 |
| Grommets & Screws | 17 |
| Security & Brackets..... | 18 |
| Ground Bars & Platforms..... | 19 |
| Mounting Covers & More | 20 |
| Enclosure Components & Cable Accessories | 21 |
| Wire Management | |
| Splice Closures & Insulators..... | 22 |
| Clamps, Clips & More..... | 23 |
| Siding Clips..... | 24-25 |
| Terms & Conditions | 26 |
| Part # Coding | 27 |

Locations & Contact Information

USA

#836 - 250 H Street
Blaine, WA 98230-4033
Phone: **360-332-3100**
Fax: **360-332-3200**

Canada

20160 92A Avenue
Langley, BC, V1M 3A4
Phone: **604-881-7875**
Fax: **604-881-7835**

Toll Free

Canada/US
Phone: **1-877-881-7875**
Fax: **1-877-881-7835**

Email

General Inquiries: primex@primex.ca
Sales Inquiries: sales@primex.ca

Website:

www.primex.ca

Feature Products

PRIMEX
MANUFACTURING

New Enclosures & NIDs

Network Interface Design Housings & Other Multi Purpose Housings



Pictured above are some of our newest housings. The **P1500I** - a surface mount housing with inner lid and secure dual hinge cover latches (optional surge protectors), **P136NID** - a 6 line NID housing with IDC cover and locking override (optional surge protectors), **P131** - a 2 line NID housing with inner lid, locking override and P127 tamper resistant lock, **PL3KIT3** - a 3 line NID housing, **P234-5** - a multi purpose housing, **PT6KIT** - a surface mount NID housing shown with 6 IDC protectors & **PWD6S** - 6 line flush mount NID housing with IDC cover (optional surge protectors).

PRIMEX MANUFACTURING

Enclosures & Accessories

Multi Purpose Housings, Wire Management Products & Accessories



P1500FIE



P1500S



IW Terminating Block



P136 w/FLP6



10917 - Surge Protector



SC2 - Splice Closure



Horizontal Siding Clips



P130T w/surge protectors

More Primex products and accessories. The **P1500FIE** - a surface mount Broadband housing with inner compartment and F81 locking device, **P1500S** - a surface mount vented base housing, **IW Terminating Block**, **P136 w/FLP6** - Housing with 6 line Fuse Link Platform will accommodate 2 platforms, **10917** - ST356-IDC surge protector, **SC2** - re-enterable splice closure, **Horizontal Siding Clips** - P106, RJ6V & P107, **P130T** - 4 line NID housing with optional surge protectors.

NID Housing

P131 & PL3

P131 - 2 Line NID Housing



Shown
P131KIT2

Features:

Weather proof design. This 2 Line NID housing can be surface, pipe or pole mounted. Accepts buried service or aerial drop wire as well as station wire. Standard color is grey.

Options:

Surge protectors and grounding bar or post. Security screw for inner lid and locking override. Flame retardant or economical polypropylene materials are available (*please specify application needs*)

Different Models: P131, P131E, P131NID, P131KIT, P131KIT1, P131KIT2

Size: H: 4.7", W: 5.4", D: 2.4"

PL3 - 3 Line NID Housing



Shown
PL3KIT3

Features:

Weather proof design. This 3 Line NID housing can be surface, pipe or pole mounted. Accepts buried service or aerial drop wire as well as station wire. Standard color is grey.

Options:

Surge protectors and grounding bar. Security screw for inner lid and a locking override. Flame retardant or economical polypropylene materials are available (*please specify application needs*)

Different Models: PL3, PL3E, PL3KIT, PL3KIT1, PL3KIT2, PL3KIT3

Size: H: 4.74", W: 6.38", D: 2.43"

NID Housing PT6 & PWD6S

PT6 - Surface Mount NID Housing



Shown
PT66IX

Features:

Weather resistant, high impact flame retardant polymer. This NID housing can be surface or pole mounted. Rear entry port, 2 side knockouts 1 interior LB knockout and conduit adapters for easy access. Standard color is grey.

Options:

Surge protectors and grounding bars. Custom logo available on special request. P137-6 with IDC protectors and cover. Security bolts and locking override. P127 tamper resistant lock.

Different Models: PT6

Size: H: 7.63", W: 5.90", D: 4.60"

PWD6S - Flush Mount NID Housing



Shown:
PWD6S
**With optional
Trim plate*



**Optional PWDPA
Pipe Adapter*



**Optional PWDSTP Trim plate*

Features:

Weather resistant, high impact flame retardant polymer. Sealed self contained housing features a grounding terminating post, top and rear body knockouts and an entry base port. Standard color is grey.

Options:

Security bolts and locking override. Trim plate. P137-6 with IDC protectors and cover. P127 tamper resistant lock. Pipe adapter. FLP6. P137-6.

Different Models: PWD6S, PWD6SF

Size: H: 7.7", W: 5.90", D: 5.60"

Weather Proof Enclosures

P123, P124 & P126

P123 - Hinged Telecom Housing

Shown
P123-5

**Features:**

Weather proof design. Versatile and adaptable housing can be surface or pole mounted. Hinged cover opens to 90° will not close while wires are being terminated. Accepts buried service wire or aerial drop wire as well as station wire. Standard color is grey.

Options:

0 to 5 termination posts, mounting bosses available to mount telco apparatus/circuit boards, P127 tamper resistant control lock, flame retardant or economical polypropylene materials are available (*please specify application needs*)

Different Models:

P123, P123-1, P123-5, P123BH*

**the P123BH is a 4 port housing with non-keyed, 8 position 4 wire jack. Includes shorting bars*

Size: H: 3.2", W: 2.7", D: 1.7"

P124 - Hinged Housing

Shown
P124-8

**Features:**

Weather proof design. Versatile and adaptable housing can be surface or pole mounted. Hinged cover opens to 90° will not close while wires are being terminated. Accepts buried service wire or aerial drop wire. Standard color is grey.

Options:

0 to 10 termination posts, P127 tamper resistant control lock, mounting bosses available to mount telco apparatus/circuit boards, flame retardant or economical polypropylene materials are available (*please specify application needs*)

Different Models:

P124, P124-1, P124-2, P124-4, P124-5, P124-8, P124-10, P124E & P124D*

**the P124D housing comes with mounting bosses.*

Size: H: 5.0", W: 3.55", D: 1.5"

P126 - Hinged Housing

Shown
126-5

**Features:**

Weather proof design. Versatile and adaptable housing can be surface or pole mounted. 180° hinged cover that will not close while wires are being terminated. Accepts an extensive variety of wiring including buried service or aerial drop wire. Standard color is grey.

Options:

0 to 12 termination posts, mounting bosses available to mount telco apparatus/circuit boards, flame retardant or economical polypropylene materials are available (*please specify application needs*)

Different Models:

P126, P126-1, P126-2, P126-5, P126-8, P126-11, P126-12, P126D*, P126E,

**the P126D housing comes with 4 mounting bosses*

Size: H: 5.0", W: 4.0", D: 2.0"

Weather Proof Enclosures

P234, P128 & P129

P234 - Multi Purpose Housing



Features:

Weather proof design. Snap lock. Two attached pole mount brackets. Versatile and adaptable housing can be surface or pole mounted. Secure hinged cover with latch & screw cover. Standard color is grey.

Options:

0 to 5 termination posts, Primex P127 security lock, surge protectors, terminating brackets, gasket available, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P234, P234-1, P234-2, P234-3, P234-4, P234-5

Size: H: 3.8", W: 3.0", D: 1.3"

P128 - Hinged Housing



Features:

Weather proof design. Versatile and adaptable housing can be surface or pole mounted. Hinged cover that stays open during installation. Standard color is grey.

Options:

F81 security locking connector, rear knockout, mounting bosses available to mount telco apparatus/circuit boards, P127 security lock, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P128, P128D*, P128F, P128FE, P128E
**the P128D comes with 4 mounting bosses*

Size: H: 9.1", W: 4.9", D: 2.75"

P129 - Detached Cover Housing



Features:

Weather proof design. Versatile and adaptable housing can be surface or pole mounted. Rear knockout. Detachable cover for easy installations. Standard color is grey.

Options:

F81 security locking connector, P127 security lock, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P129, P129F, P129FE, P129E

Size: H: 7.2", W: 4.9", D: 1.8"

Weather Proof Enclosures

P130 & P136

P130 - Multi Media Housing



Shown P130FE
with optional conduit adapter

Features:

Weather proof design. Surface or pole mounted. Lid can be removed if another enclosure is mounted on the left side. Standard color is grey.

Options:

Rear knockouts, F81 security locking system, P137 platform with 4 PTDs and grounding bar, security bolts & locking override, conduit adapter, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P130, P130F, P130FE, P130OQ, P130T, P130E, P130P

Size: H: 7.1", W: 5.5", D: 2.9"

P136 - Multi Media Housing with Hidden Hinge



Shown P136F

Features:

Weather proof design. Hidden Hinge. Versatile and adaptable housing can be surface or pole mounted. Standard color is grey.

Options:

Rear knockouts, F81 security locking system, cap for F81 lock, FLP6, hex bolt and brass insert, locking inner lid, locking override, conduit adapters, slotted base, extended lid, mounted ties downs, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P136, P136CE, P136F, P136FE, P136FEKIT, P136FEXT, P136FXT, P136KIT, P136P, P136RR, P136RR1, P136E, P136XT, P136XTO

Size: H: 10.3", W: 7.7", D: 3.1"

Size w/Extended Lid: H: 10.3", W: 7.7", D: 4.2"



P136P - with optional FLP6
- accepts 2 FLP6's



P136FEKIT - Inner Lid Closed



P136FEXT

Weather Proof Enclosures

P138 & P140

P138 - Multi Media Housing with Hidden Hinge



Shown P138FREM
with optional Ground
Block NOT Included

Features:

Weather proof design. Snap lock. 4 additional cable entry ports. Versatile and adaptable housing can be surface or pole mounted. Hidden hinge. Standard color is grey.

Options:

F81 security locking connector, cap for F81, legs, rear knockout, seal ring base for mounting to pre-wire housing, P140SC siding clip for mounting, conduit adapters, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P138, P138FCE, P138FRE, P138FREM, P138FSE, P138FSEO, P138SEO, P138SEW, P138FE, P138E

Size: H: 9.0", W: 6.1", D: 3.1"

P140 - Telecom Housing

Shown P140



Features:

Weather proof design. 2 base knockouts. Removable lid for easy access. Standard color is grey.

Options:

Conduit adapters, P137-6 platform & IDC protectors, locking override, hex bolt and brass insert, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P140, P140E, P140F, P140T

Size: H: 13.0", W: 9.2", D: 4.1"

P140FR - Multi Media Housing

Shown P140FR
Ground Block NOT Included



Features:

Weather proof design. 2 base knockouts. Removable lid for easy access. Standard color is grey.

Options:

F81 security locking connector, slotted base, conduit adapters, hex bolt and brass insert, P140SC siding clip for mounting, flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: P140F, P140FE, P140FUE, P140FYE, P140FR, P140FRE, P140M,

Size: H: 13.0", W: 9.2", D: 4.1"

Weather Proof Enclosures

P1500

P1500 - Multi Purpose Surface Mount Housing



P1500S
w/ Gasket Seal
& vented base



P1500FIE
w/ 2 compartments
& locking inner lid



P1500I w/ Inner Lid & surge protectors*
**Surge protectors not included with this box*



P1500H w/ Subscriber Compartment

Features:

Weather proof design. Snap locks to ensure lid seals to base. 2 base knockouts. Large inner cavity allows ample room to work in. FTTP, FTTH, Telecom, CATV or custom applications. 4 entry ports: two 3/4" & two 1" diameter. Standard color is grey.

Options:

Override lock, custom security screw, F81 lock or self tapping screw. 1" & 3/4" conduit adapters. Gasket Seal. Vented base. Subscriber compartment. Inner lid. Surge protectors and grounding bars. 3 available polymer types. Flame retardant or economical polypropylene materials are available (*please specify application needs*).


Different Models: P1500, P1500FE, P1500FIE, P1500G, P1500GE, P1500H, P1500HE, P1500I, P1500S, P1500TI

Size: H: 14.1", W: 10.0", D: 5.25"

Broadband Enclosures

PT6F & PWDSF

PT6F - Multi Port Broadband Housing

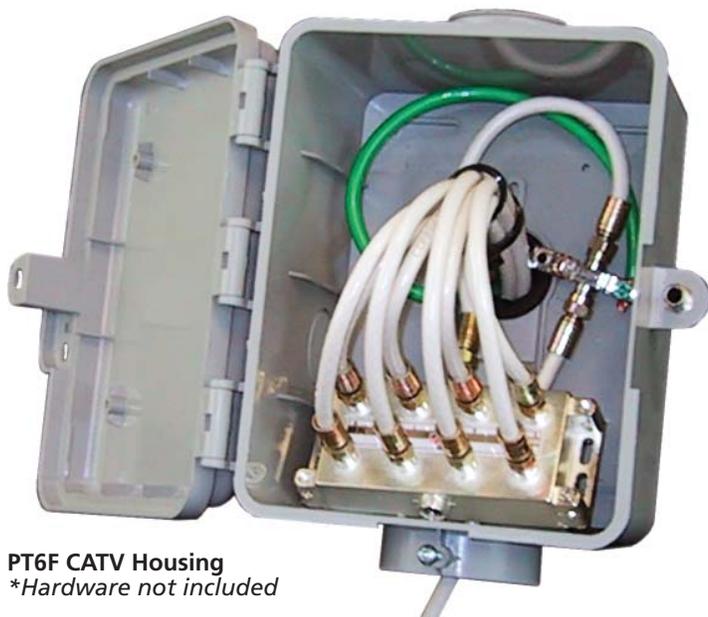

PT6F CATV Housing
*Hardware not included

Features:

Multi port, weather proof design. Rear entry port, 2 side knockouts. 1 interior LB knockout and conduit adapters. Standard color is grey.

Options:

F81 security locking connector. Flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: PT6F, PT6FE

Size: H: 7.63", W: 5.90", D: 4.60"

PWDSF - Multi Port Sealed, Broadband In-wall Housing



*Optional PWDPA
Pipe Adapter



*Optional PWDSTP Trim plate

Features:

Multi port, sealed, weather proof design. Top and rear knockouts and a base entry port. Standard color is grey.

Options:

F81 security locking connector. Pipe adapter. Top and bottom drip ledges. PWDSTP trim plate. Flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: PWDSF, PWDSFE

Size: H: 7.7" X W: 5.90" X D: 5.60"


Indoor Enclosures

RB8P

RB8PF & RB8SL - In-wall Housing



Shown: RB8PF

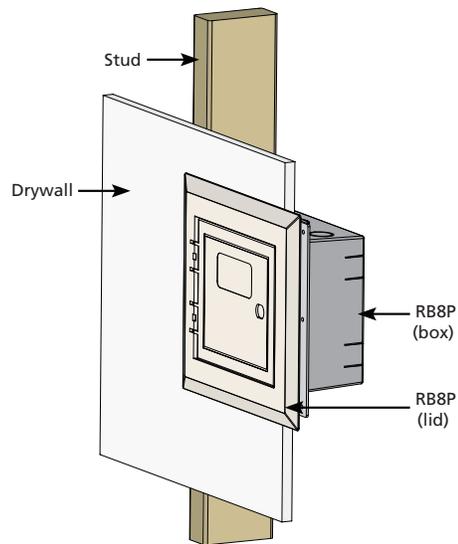

Typical Installation

Features:

Flush mount in-wall housing. Standard color of lid is beige, and the standard color of the box is grey.


Options:

F81 security locking connector. Large flange for mounting to studs. Supra lock opening. Flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: RB8PF, RB8SL, RB8PFS, RB8SLS

Size: H: 6.8", W: 8.3", D: 3.7"

RB8PFS & RB8SLS - In-wall Housing with Large Flange

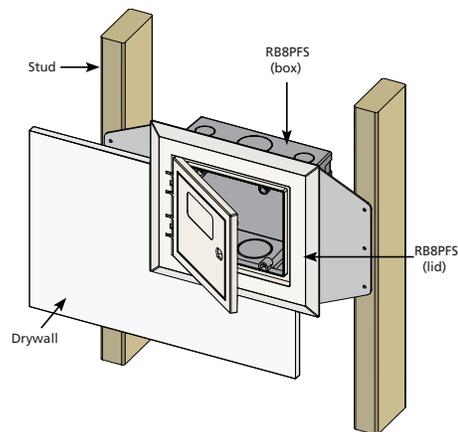

Features:

Flush mount in-wall housing. Large flange for installation between two studs maximum 16" apart. Standard color of lid is beige, and the standard color of the box is grey.

Options:

F81 security locking connector. Supra lock opening. Flame retardant or economical polypropylene materials are available (*please specify application needs*).

Different Models: RB8PF, RB8SL, RB8PFS, RB8SLS

Size: H: 6.8", W: 8.3", D: 3.7"

Modular Jacks

AN90, GV90, L1, P110 & T6

AN90 - Interconnect Jack Housing

**Features:**

User friendly design to facilitate circuit isolation: 2 port entry and easy-slide tamper proof cover. This interconnection device is ideal for such automated meter reading and utilizing on-site telephone lines. The **AN90** comes complete with 4 termination posts, single modular disconnect plug and 6 position, 2 wire jack assembly. Standard color is grey.

Size: H: 3.4", W: 2.0", D: 1.4"

GV90 - Data Jacks

**Features:**

Used by telephone companies as an interface point to terminate S4T4 private line and limited distance data circuits. Mechanical specifications are in accordance with **CS03** for 8-position keyed jacks. Standard color is ivory.

Different Models: **GVL90L1** - Voice band data jack, **GV90L2** - Loop back data jack

Size: H: 4.5", W: 2.4", D: 1.4"

L1 - Jack Housing

**Features:**

6 position jack, 2 wire configuration Versatility to work with most Primex enclosures. 2 mounting holes option available on the **L1**. Standard color is black.

Different Models: **L1A** - one mounting hole, **L1B** - 2 mounting holes compatible with Primex's **P137** mounting plate.


P110 - RV Jack

**Features:**

Surface mount jack is ideal for recreational vehicles and marine installations. Available with either 4 or 6 screw terminals. Both options feature strain relief for weatherproof cap-tire cable. Standard color is ivory.

Size: H: 2.4", W: 1.9", D: 0.9"

T6 - Telephone Jack

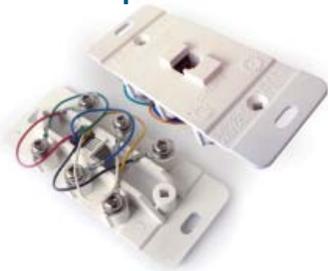**Features:**

6 line telephone jack. Utilizes any common electrical light switch cover plate to conceal the cavity and wiring. 4 or 6 screw configurations available. Standard color is white.

Different Models: **T6-4** - 4 position, four wire jack, **T6-6** - 6 Position, 6 wire jack

Enclosure Accessories

Protectors & Termination Blocks


Surge Protectors & Terminating Block



10912
356 Surge Protector




10917
ST356-IDC - Surge Protector

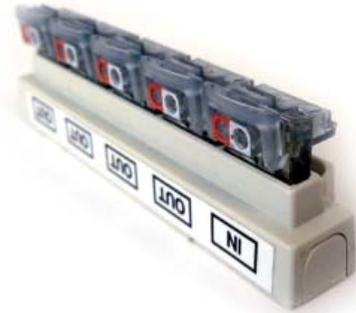

IW Terminating Block
5 Pair Terminating Block

FLP6 - Fuse Link Platform

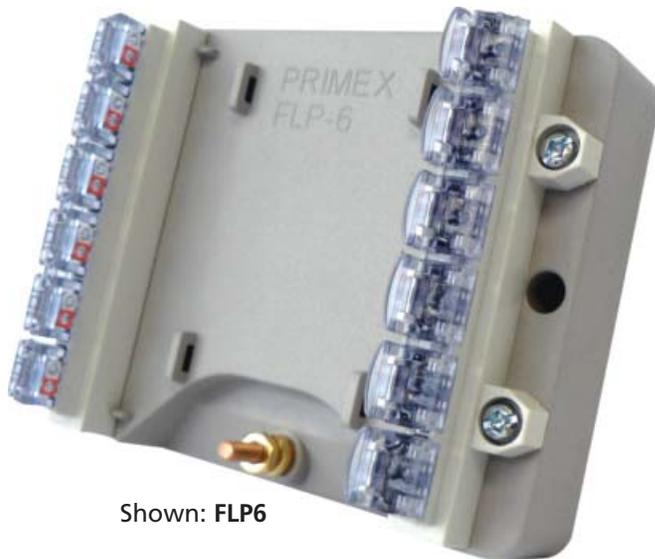

Shown: FLP6

Features:

Can be used as an alternative to Double posts, 356 protectors, T-bars or 24" jumper wire. Designed to accommodate 6-pair figure 8 configuration. A 12-pair figure 8 configuration can be accommodated if a 2nd platform is used. Standard color is grey.



Shown: P136 with optional FLP6

Compatibility: P130, P136, P131, P136, P138, P140, PT6, PWDS

Size: H: 2.4", W: 1.9", D: 0.9"

Enclosure Accessories

Grommets & Screws

Grommets and Conduit Adapters



05102/05102UL

Small Grommet 3/4"
Compatibility: P123, P124, P126, P128, P129, P131, PL3, P1500
Standard Colors: Grey & Black
**05102UL for use in UL approved housings*



05103/05103UL

Large Grommet 1"
Compatibility: P130, P136, P138, P140, P1500
Standard Colors: Grey & Black
**05103UL for use in UL approved housings*



05104/05104UL

1" Conduit Adapter
Compatibility: P130, P136, P138, P140, P1500
Standard Color: Black
**05104UL for use in UL approved housings*



05105/05105UL

3/4" Conduit Adapter
Compatibility: P130, P136, P138, P140, P1500
Standard Color: Black
**05105UL for use in UL approved housings*



05106UL

1 1/4" Round Grommet
Compatibility: PT6
Standard Color: Black
**05106UL for use in UL approved housings*



05103PVC

1" Large PVC Plug
Compatibility: P130, P136, P138, P140, P1500
Standard Color: Grey



05104PVC

3/4" PVC Conduit Adapter
Compatibility: P130, P136, P138, P140, P1500
Standard Color: Grey



05101

1/4" Small Grommet
Compatibility: PWDS & AN90
Standard Color: Black

Screws & Closures



10132

#10 Hex Head Screw for use with override (06001) or brass insert (10501)



10134

Self tapping screw - minimum security. Slotted Robertson head. For use with P126, P128, P129, P130, P136, P138, P140



10147

Self tapping screw - minimum security. Slotted Phillips head. For use with P126, P128, P129, P130, P136, P138, P140



10139

#8 Security Screw. For use with locking override (06001) & brass insert (10501)



10501

Brass Insert. Use with override device (06001) or alone with screw #10139, #10147 or screw #10132.
Compatibility: P126, P130, P136, P138, P140



10407

F81 Security locking connector.
Compatibility: P128, P129, P130, P136, P138, P140, PT6, PWDSF, P1500

Enclosure Accessories

Security & Brackets

Security Devices



06001

Locking override - Maximum Security.
For use with 10132, 10139
Compatibility: P130, P136, P138, P140, PT6,
PWD6 *Standard Color is Grey*



P127

Control Lock - Tamper Resistant
No keys • No special tools • No rusting • Re-usable lock body
Compatibility: P123, P124, P128, P234, P129
P127A - Lock link colors: Black, Red, Green, Blue & More
P127B Lock body color is black



05302

Cap for F81 - non-hinged,
weather resistant.
Compatibility: P128, P129, P140
Standard Color is Grey



05302

Cap for F81 - non-hinged,
weather resistant.
Compatibility: P130, P138
Standard Color is Grey

Terminating Brackets



T4-1

Terminating Bracket - 1 post
Mounting Hole Distance: 2.0"
Compatibility: All PRIMEX enclosures
Packaging: 100/bag



T4-2

Terminating Bracket - 2 post
Mounting Hole Distance: 2.0"
Compatibility: All PRIMEX enclosures
Packaging: 100/bag



T4-2R

Terminating Bracket - 1 post
Mounting Hole Distance: 1.0"
Compatibility: All PRIMEX enclosures
Packaging: 100/bag



T5

Brass Connector
Connects 2 sets of protector modules from
1 T4 to the other
Compatibility: All PRIMEX enclosures
Packaging: 100/bag

Enclosure Accessories

Ground Bars & Platforms

Leg Extenders



05202


Leg Extenders
Compatibility: P128, P140
Standard Color: Grey



05203

Leg Extenders
Compatibility: PT6
Standard Color: Grey

Grounding Bars

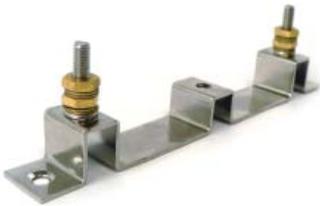

GBAB02

Ground Bar - comes with nuts & washers
Compatibility: P136, P138, P140, PT6, PWD6, P137-6



GBBC01 w/JM95-6

6 Post Ground Bar with JM95-6 Security Bracket
Compatibility: P136, P138, P140, PT6, PWD6, P137-6



11108

Grounding Bar- comes with nuts & washers
Compatibility: PL3




11105 w/JM95-4

4 Post Grounding Bar with JM95-4 Security Bracket
Compatibility: P137

P137 Platforms

P137-6 with optional GBAB02

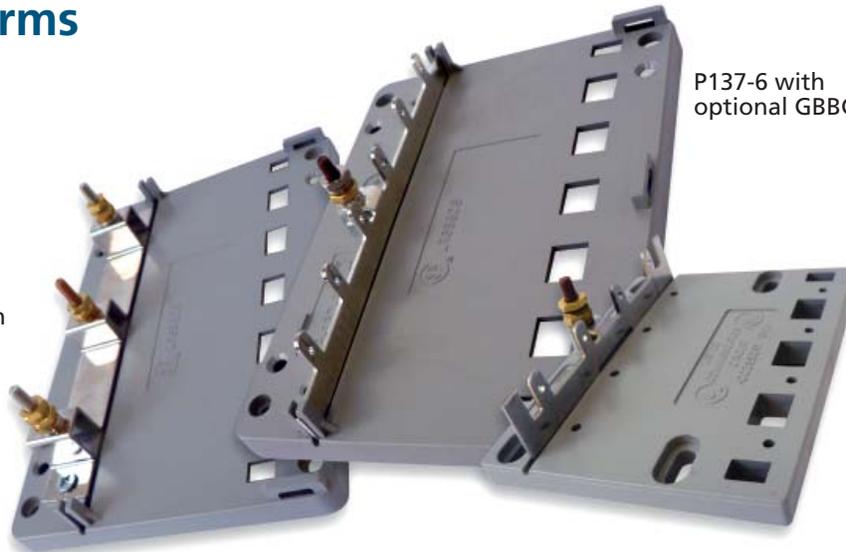

P137-6 with optional GBBC01

P137 with 11105 Optional Grounding Bracket

P137 Platform

The P137 will accommodate a maximum of 4 PTDs. Compatibility: P128, P129, P130, P131, P136, P138, P140, PW6D

Size **P137**: H: 4.5" X W: 3.6" X D: 0.04"

P137-6 Platform

The P137-6 will accommodate a maximum of 6 PTDs. Compatibility: P136, P140, PT6, PWDS

Size **P137-6**: H: 4.7" X W: 6.8" X D: 0.04"

Enclosure Accessories

Mounting , Covers & More

NIDM94 - Mounting Platform

**Features:**

Can be used with various component configurations. Comes with grounding bar, mounting post and washer and nut hardware. Can accommodate a maximum of 4 PTDs. Standard color is grey.

Compatibility: Metal pre-wire housing

GM79 - Mounting Plate

**Features:**

Mounts a variety of boxes, terminals or access housing to vinyl or aluminum siding. Easily pushed into place by either hand or with use of a screw driver. Standard color is grey.

Compatibility: P123, P124, P126, P128, P129, P131

Size: H: 2.5" X W: 6.0"

140SC - Mounting Bracket

**Features:**

Mounts a variety of boxes, terminals or access housing to vinyl or aluminum siding. Easily pushed into place by either hand or with use of a screw driver. Standard color is grey.

Compatibility: P130, P136, P138, P140

P122 - Protective Cover

**Features:**

Covers 66M and 66B connecting blocks. Standard color is clear.

Compatibility: 66M, 66B connecting blocks

Gasket Kit

**Features:**

Kit includes gasket and nuts. For mounting onto pre-wire metal housing. Standard color is grey.

Compatibility: P130, P136, P138, P140

Enclosure Accessories

PWDS Accessories / Cable Hardware

PWDS Series Accessories



PW DSTP

Trim Plate
Alternative to J Channel where appropriate. Mounting screw holes for extra security.

Compatibility: PWDS Series
Standard Color: Grey



PW DPA

Pipe Adapter
To accommodate conduit access or combination mount housing connections.

Compatibility: PWDS Series
Standard Color: Grey

Cable Hardware

F81 Locking Tools

F81 Lock





10407
F81 Locking
Connector



F81 Tool



TH6 - Trap/
Filter Holder

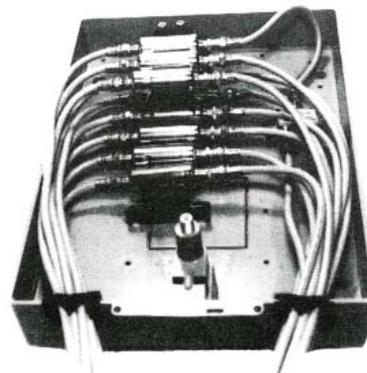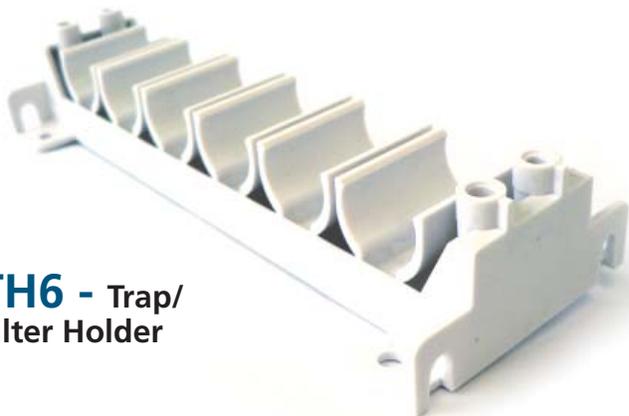

TH6 Typical Install

Wire Management Splice Closures/Insulators

CS659 - Splice Closure



Features:

The CS659 is a re-enterable RG59, RG6 or 2 pair wire drop splice protection housing. Filled with a non-conductive inert grease to provide a water sealant for the splice. If re-entered, the grease will continue to provide a seal. Standard color is black.

Size: H: 4.0" X Diameter: 0.8"

SC2 - Splice Closure



Features:

Watertight design. Manufactured for strength and durability. Reusable & re-enterable. Accommodates copper or fibre cable. Can be used in direct buried service vault or aerial applications. Standard color is grey.

Different Models: SC2 - with strain release clamp, SC2M - w/ mounting bracket & clamp, SC2MN - w/ mounting bracket, no clamp, SC2N - no clamp

Cable Diameter Range: 9/32" (7MM) to 7/16" (11MM)

T2 & T3 - Splice Closure



Shown: T2



Features:

Designed to protect splices in 2 pair drop wire. User friendly design make job quick and easy, simply splice the cable in the standard way using UY Scotch lock connectors and insert the splice into the silicon-grease filled closure and snap shut. Standard color is black.

Different Models: T2 - for use with flat 2 pair drop wire, T3 - for use with PhD 2 pair drop wire.

Size T2: H: 3.0" X W: 0.8" X D: 0.5"


Size T3: H: 2.7" X W: 0.7" X D: 1.6"

Wire Management Clamps, Clips & More

B Series Cable Clamp



Shown: B112

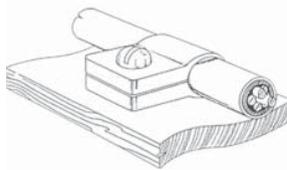


Typical Usage

Features: UV Stabilized polymer resin clamps ideal for indoor and outdoor use. Unique jaw design prevents cable slippage.

Different Models: B111 - accepts 0.140" dia., B112 - accepts 0.395" dia., B113 - accepts 0.125" dia., B114T - accepts 0.320" & 0.180" rectangular wire, B115 - accepts 0.235" dia., B116 - accepts 0.312" dia., B117 - accepts 0.275" dia.

Colors: Black, Grey, Dusty Peach, White & Natural. *Custom colors available.*

P108 - Tie Mount Cradle

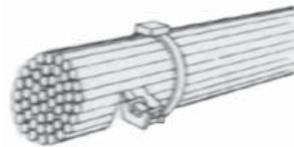


Typical Usage

Features:

Securely bundles cable. For use with a cable tie. Ultra high strength re-usable polymer cradle.

Colors: Black & Natural. *Custom colors available.*

P118 - Cable Locking Clip

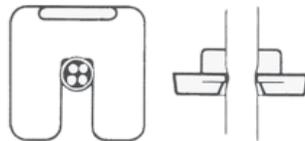

Typical Usage


Features:

Simple and effective strain relief to prevent drop wire from being broken off of terminating posts. For use with 2, 4 pair drop wire.

Different Models: P118T - accommodates 0.17" cable dia., P118P - accommodates 0.325" cable dia.

Color: Grey. *Custom colors available.*

P119, P120, P121 - Jumper Cable Rings

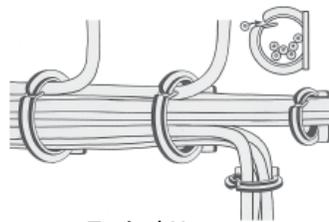

Typical Usage

Features:

Manufactured from durable, rigid, fire retardant polymer. Extremely light weight and easy to install.

Different Models: P119 - 2.0", P120 - 3.5", P121 - 1.25"

Color: Grey. *Custom colors available.*

P133 - Drop Saver



Features:

Coaxial cable protector. Designed to fit the standard "F" coaxial cable connector. Protects the coaxial center core conductor from damage and prevents moisture from entering the connector.


Color: Black & Grey. *Custom colors available.*

Wire Management Siding Clips

Vertical Siding Clips




P102

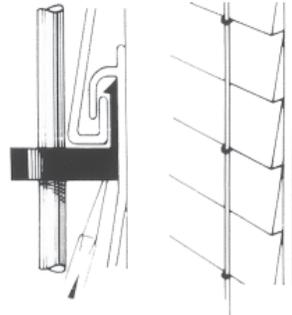

P102 Typical Install



P103

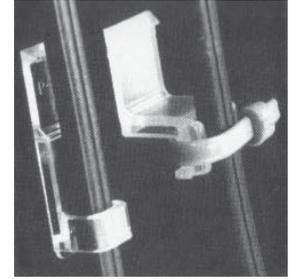


P103 & 103S Typical Install



P104

P105

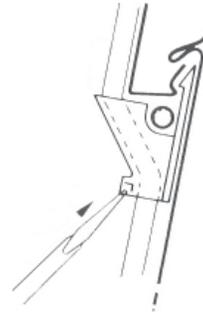

P105 Typical Install


Features:

Require no screws, nails or staples for installation. Perfect for aluminum or vinyl siding. **Colors Available:** Black, Clear, Dusty Peach. *Custom colors available. For the P103, P103S, P104 & P105 the standard color is clear.*

| Part # | Description | Recommended For | Cable Size |
|---------|-----------------------|--------------------------------------|----------------------------------|
| P100-4P | Short Hook Clip | 4 pair drop wire, RG7 coaxial cable | 0.312" diameter |
| P100-6 | Short Hook Clip | RG6 coaxial cable | 0.275" diameter |
| P100-10 | Short Hook Clip | #10, #14 ground wire | 0.170" diameter |
| P100-11 | Short Hook Clip | RG11 coaxial cable | 0.395" diameter |
| P100-NT | Short Hook Clip | Flat wire drop | 0.320" x 0.180" rectangular wire |
| P102-4P | Long Hook, Mount Hole | 4 pair drop wire, RG7 coaxial cable | 0.312" diameter |
| P102-6 | Long Hook, Mount Hole | RG6 coaxial cable | 0.275" diameter |
| P102-10 | Long Hook, Mount Hole | #10, #14 ground wire | 0.170" diameter |
| P102-11 | Long Hook, Mount Hole | RG11 coaxial cable | 0.395" diameter |
| P102-NT | Long Hook, Mount Hole | Flat wire drop | 0.320" x 0.180" rectangular wire |
| P103 | Regular Clip | Flat wire drop | 0.320" x 0.180" rectangular wire |
| P103S | Tie Wire Clip | Flat wire drop | Any with use of tie wrap |
| P104 | Short Hook | 2 pair drop wire, RG59 coaxial cable | 0.235" diameter |
| P105 | Long Hook | 2 pair drop wire, RG59 coaxial cable | 0.235" diameter |
| P104-6 | Short Hook | RG6 coaxial cable | 0.275" diameter |
| P105-6 | Long Hook | RG6 coaxial cable | 0.275" diameter |

Wire Management Siding Clips


Horizontal Siding Clips

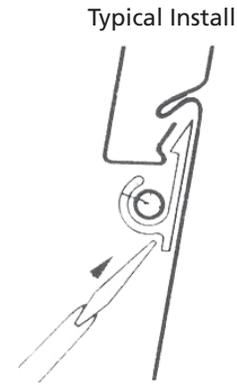

Features: Require no screws, nails or staples for installation. Perfect for aluminum or vinyl siding. **Colors Available:** Standard color is clear. *Custom colors available.*

| Part # | Description | Recommended For | Cable Size |
|--------|-----------------|--------------------------------------|-----------------|
| P106 | Short Hook Clip | 2 pair drop wire, RG59 coaxial cable | 0.235" diameter |
| P107 | Long Hook Clip | 2 pair drop wire, RG59 coaxial cable | 0.235" diameter |
| RJ6A | Short Hook Clip | RG6 coaxial cable | 0.275" diameter |
| RJ6V | Long Hook Clip | RG6 coaxial cable | 0.275" diameter |

Universal Siding Clips

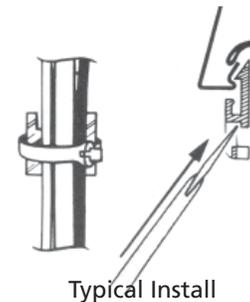

Features:

Adapt to either vertical or horizontal cable runs. Commonly used with cable diameters up to 0.125", though can accommodate significantly larger diameter when used with cable tie.

Colors Available: Black & Clear. *Custom colors available.*

| Part # | Description | Recommended For | Cable Size |
|--------|-----------------|-------------------|-----------------|
| T1A | Short Hook Clip | 1/8" Station Wire | 0.125" diameter |
| T1B | Long Hook Clip | 1/8" Station Wire | 0.125" diameter |

Terms & Conditions

- QUANTITIES:** Primex reserves the right to change quantities to the nearest packaging size lots. Minimum order is \$100.00 net.
- FREIGHT:** All orders are shipped F.O.B. our facility.
- TERMS:** Terms are net 30 days from invoice date upon credit approval. Past due invoices are subject to 1.5% interest per month. (18.0% annum.)
- WARRANTY:** Primex's obligation and warranty shall be to repair or replace at our discretion, for a period of one year after shipment, any parts which we deem to be defective in material or workmanship. Applies only to equipment and or parts that have been properly installed and not otherwise abused altered or damaged.
- RETURNED GOODS:** No products may be returned without a material return authorization from Primex Manufacturing.
- On items that are acceptable for credit, as determined by Primex Manufacturing, a minimum charge of no less than 25% will be assessed, for handling, inspection and packaging. All returned goods must be shipped freight prepaid.
- NOTICE:** Prices, specifications and designs are subject to change without prior notice.



Available for most products

Part # Coding

| Coding | Description |
|------------|---|
| A | Link |
| B | Body |
| C | Cap |
| D | Compartmental partition |
| E | Manufactured with polypropylene |
| F | F81 security locking connector |
| P (suffix) | Comes with FLP6 (Fuse Link Platform) |
| IL | Inner Lid |
| K | Knockouts, customized configuration |
| KIT | Assembled hardware included |
| M | Mounting features |
| N, NH | No hardware included |
| NID | Network interface device |
| O | Primex logo omitted |
| Q | Meets CSA approval - standard with may products, but not currently tagged |
| Q1 | Meets UL or ULC approval - standard with may products, but not currently tagged |
| Q2 | Meets ULC and CSA approval - standard with may products, but not currently tagged |
| R | Slotted Base |
| S | Base Seal |
| SC | Siding Clip |
| SMP | Splitter mounting partition |
| T | Telecom |
| U | Text in English only |
| UL or Q1 | Meets UL or ULC approval |
| V | Increased UV package |
| W | White |
| XT | Extended lid |
| Y | Extended legs |

**Coding applicable only when appearing as tags on the part #'s*



www.primex.ca

Locations & Contact Information

USA

#836 - 250 H Street
Blaine, WA 98230-4033
Phone: **(360) 332-3100**
Fax: **(360) 332-3200**

Canada

20160 92A Avenue,
Langley, BC V1M 3A4
Phone: **(604) 881-7875**
Fax: **(604) 881-7835**

Toll Free

USA & Canada
Phone: **(877) 881-7875**
Fax: **(877) 881-7875**
www.primex.ca

General Inquiries email: primex@primex.ca
Sales Inquiries email: sales@primex.ca

PRIMEX
MANUFACTURING