

GSHS – 1650F

2:1 SHRINK RATIO, FLEXIBLE, HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE PVdF TUBING

Applications

GSHS-1650F is a flexible, thin wall, flame retardant, heat shrinkable polyvinylidene fluoride (PVdF) tube for applications requiring outstanding abrasion and cut-through resistance. It reliably protects wires, solder joints, terminals, connections and components from most industrial fuels, solvents and chemicals.

Features

- ★ Shrink ratio: 50% or more in the radial direction, 10% or less in the axial direction
- ★ Continuous operating temperature: - 55°C to 150°C
- ★ Flammability: UL VW-1, CSA OFT
- ★ Thin wall
- ★ High resistance to chemicals and oils

Standard

- ★ UL 224 (File Number: E84393)
- ★ MIL-DTL-23053/18 Class 2

Specification Values

	Property	Test Method	Value
Physical	Tensile strength	51 mm/minute	Minimum 3500 psi
	Elongation		Minimum 300%
	Deformation	150°C/1 hr	Max. 50%
	Heat shock	275°C/4 hrs	No cracking, flowing or dripping
	Cold bend	- 55°C/4 hrs	No cracking
	Specific Gravity	-	1.9 Maximum
	Secant Modulus	2% strain	25,000 ~ 120,000 psi
Electrical	Dielectric strength	Room temp.	400 volts/mil
	Volume resistivity	Room temp.	Min. $10^{10} \Omega$ - cm
Chemical	Copper corrosion	160°C/168 hrs	No corrosion of bare copper
	Fungus Resistance	-	No growth
	Flammability	-	Pass

Rev. May 1998




Dunbar Associates

Your Stocking Partner for Quality Components

P.O Box 671161, Dallas, Texas 75367-1161
Tel: (972) 241-0300
Fax: (972) 241-0315

GSHS – 1650F

2:1 SHRINK RATIO, FLEXIBLE, HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE PVdF TUBING

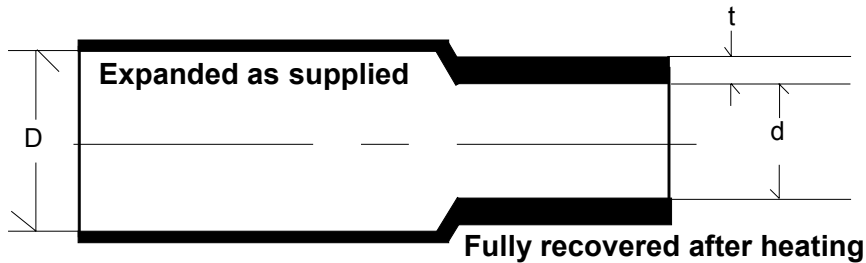

Product Dimensions

Minimum Shrink Temperature: 125°C

Size	Expanded		Recovered				Standard Spool Length
	Internal Diameter (Minimum) (D)		Internal Diameter (Maximum) (d)		Minimum Wall Thickness (t)		
Inch Size	In.	mm	In.	mm	In.	mm	Ft.
3/64"	0.047	1.2	0.023	0.58	0.008	0.203	500
1/16"	0.063	1.6	0.031	0.79	0.008	0.203	500
3/32"	0.094	2.4	0.046	1.17	0.009	0.229	500
1/8"	0.125	3.2	0.062	1.57	0.009	0.229	500
3/16"	0.188	4.8	0.093	2.36	0.009	0.229	250
1/4"	0.251	6.4	0.125	3.18	0.011	0.279	250
3/8"	0.377	9.6	0.187	4.75	0.011	0.279	200
1/2"	0.503	12.8	0.250	6.35	0.011	0.279	200
3/4"	0.759	19.3	0.375	9.53	0.014	0.356	100
1"	1.000	25.6	0.500	12.7	0.016	0.406	100

Standard Color: Clear & Black
 Optional Color(s): Available, please inquire

Rev. May 1998



Dunbar Associates
 Your Stocking Partner for Quality Components

P.O Box 671161, Dallas, Texas 75367-1161
 Tel: (972) 241-0300
 Fax: (972) 241-0315