



# LIQUID TIGHT CONDUIT AND TUBING

## LIQUID TIGHT CONDUIT - 600V RATING

B



- Sizes from 3/8" to 2"
- Integral Rigid and Flexible PVC Construction resists Pull and Crushing. Suitable for Indoor or Outdoor use.
- Temperature Ratings:  
Dry . . . . . 0° to 176°F (-180 to 80°C)  
In Oil . . . . . Up to 160°F (70°C)  
Wet Locations .Up to 140°F (60°C)
- CCNY & CCPV use Straight-Thru and Right-Angle Conduit Connectors
- Cut to Length with SR-100 Cutting Tool (see Spiral Wrap)



Use our SR-100 Cutting Tool.

Item Number	Trade Size	UL/CSA Desc.	A Outside Diameter (Inch)	B Inside Diameter (Inch)	Quantity
FTPV-375-8	3/8	HF1 3/8	.700	.494	Stocked in 100 Foot Rolls
FTPV-500-8	1/2	HF1 1/2	.830	.632	
FTPV-750-8	3/4	HF1 3/4	1.040	.830	
FTPV-1000-8	1	HF1 1	1.303	1.054	
FTPV-1250-8	1 1/4	EC125	1.660	1.410	
FTPV-1500-8	1 1/2	EC150	1.900	1.600	50 Ft
FTPV-2000-8	2	EC200	2.375	2.045	

\*Consult factory for delivery in black

Use CCNY-XXX-8 or CCPV-XXX-8 connectors on pages 23, 34.

## NON-METALLIC ELECTRICAL TUBING\* - 300V RATING



- Maximum flexibility tubing can be used in extremely tight quarters
- Smooth inside for easier wire pulling
- Suitable for high vibration or flexing applications
- Black
- CSA approved as liquid-tight tubing only
- Not CSA approved for mechanical protection - not considered conduit

Item Number	Trade Size	UL/CSA Desc.	A Outside Diameter (Inch)	B Inside Diameter (Inch)	Quantity
TUPV-250-0	1/4	ET025	.575	.405	100
TUPV-375-0	3/8	ET038	.710	.504	100
TUPV-500-0	1/2	ET050	.840	.642	100
TUPV-750-0	3/4	ET075	1.050	.840	100
TUPV-1000-0	1	ET100	1.315	1.066	100
TUPV-1250-0	1 1/4	ET125	1.660	1.410	100
TUPV-1500-0	1 1/2	ET150	1.900	1.600	50
TUPV-2000-0	2	ET200	2.375	2.045	50



Use CCNY-XXX-0 or CCPV-XXX-0 connectors on pages 23, 24.

# LIQUID TIGHT CONNECTORS - NYLON

## Straight and Right Angle Non-Metallic Connectors



Approved




- Four Sizes for 3/8" to 1" Conduit
- No Disassembly Required to Install. Simply push Conduit or Tubing over Ferrule and tighten Sealing Nut
- No Threading of Conduit is Necessary. Lower your Installed Cost
- UL Listed; CSA Approved; U.S. Patent 4,900.068
- Connector may be reused. Turn Sealing Nut in Clockwise direction to Release Conduit
- Molded 6/6 Nylon. Non-Conductive, Non-Corrosive; Resistant to Fuels, Lubricants and most Chemicals

B

### Straight Connector

Black Connector with Nylon Locknut Item Number	Grey Connector with Steel Locknut Item Number	For Conduit	UL/CSA Desc.	Thread Size	Body and Sealing Nut				
					A K.O. Size Inch	C O.A. Length Inch	D Thread Length Inch	E Nut Thickness Inch	F Flats Inch
CCNY-250-0	CCNY-250-8	1/4	HFC 1/4	1/2 NPT	1/2	2	5/8	1/4	1 21/64
CCNY-375-0	CCNY-375-8	3/8	HFC 3/8						
*CCNY-500-0	*CCNY-500-8	1/2	HFC 1/2	3/4 NPT	3/4	2 1/32	25/32	1/4	1 9/16
CCNY-750-0	CCNY-750-8	3/4	HFC 3/4						1 13/16
CCNY-1000-0	CCNY-1000-8	1	HFC 1	1 NPT	1	2 1/4	25/32	1/4	1 13/16

For Conduit 1 1/4" and larger, use CCPV connectors on page 24.

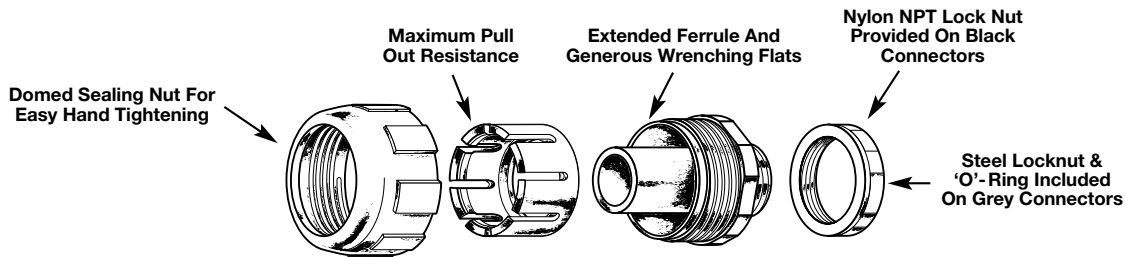

### Right Angle Connector

Black Item Number	Grey Item Number	For Conduit	UL/CSA Desc.	Thread Size	Body and Sealing Nut			
					A K.O. SIZE Inch	B O.A. Height Inch	C O.A. Length Inch	D Thread Length Inch
CCNY-3790-0	CCNY-3790-8	3/8	HFC 3/8-90	1/2 NPT	1/2	2 9/64	2 9/16	5/8
*CCNY-5090-0	*CCNY-5090-8	1/2	HFC 1/2-90					
CCNY-7590-0	CCNY-7590-8	3/4	HFC 3/4-90	3/4 NPT	3/4	2 3/8	2 27/32	5/8
CCNY-1090-0	CCNY-1090-8	1	HFC 1-90	1 NPT	1	2 13/16	3 1/4	25/32

Above product is grey coloured for use with FTPV conduit. For TUPV black connectors, change suffix -8 to -0.

i.e. CCNY-375-0. All other specifications remain the same.

For Conduit 1 1/4" and larger, use CCPV connectors on page 24.

# LIQUID TIGHT CONNECTORS - PVC

## Snap-In Straight and 90° Non-Metallic Connectors

B



For use with non-metallic liquid-tight conduit, type B. Produced from UV rated plastic for long outdoor life.



### Straight Connector

Black Item Number	Grey Item Number	For Conduit	UL/CSA Desc.	Thread Size	Body and Sealing Nut				Carton Quantity
					A K.O. Size Inch	B O.A. Length Inch	C O.A. Height Inch	D Thread Length Inch	
CCPV-375-0	CCPV-375-8	3/8	HFC 3/8-S	1/2 NPT	1/2	1.545	1.400	.535	100
CCPV-500-0	CCPV-500-8	1/2	HFC 1/2-S						
CCPV-750-0	CCPV-750-8	3/4	HFC 3/4-S	3/4 NPT	3/4	1.600	1.583	.550	50
CCPV-1000-0	CCPV-1000-8	1	HFC 1-S	1 NPT	1	1.975	1.925	.670	25
CCPV-1250-0	CCPV-1250-8	1 1/4	HFC 1 1/4-S	1 1/4 NPT	1 1/4	2.293	2.425	.645	
CCPV-1500-0	CCPV-1500-8	1 1/2	HFC 1 1/2-S	1 1/2 NPT	1 1/2	2.175	2.700	.660	10
CCPV-2000-0	CCPV-2000-8	2	HFC 2-S	2 NPT	2	2.400	3.360	.670	

### 90° Connector

CCPV-3790-0	CCPV-375-8	3/8	HFC 3/8-S	1/2 NPT	1/2	2.242	2.460	.562	50
CCPV-5090-0	CCPV-5090-8	1/2	HFC 1/2-S						
CCPV-7590-0	CCPV-7590-8	3/4	HFC 3/4-S	3/4 NPT	3/4	2.550	2.840	.545	25
CCPV-10090-0	CCPV-10090-8	1	HFC 1-S	1 NPT	1	3.150	3.680	.630	
CCPV-12590-0	CCPV-12590-8	1 1/4	HFC 1 1/4-S	1 1/4 NPT	1 1/4	3.420	4.650	.645	10
CCPV-15090-0	CCPV-15090-8	1 1/2	HFC 1 1/2-S	1 1/2 NPT	1 1/2	4.510	4.470	.660	
CCPV-20090-0	CCPV-20090-8	2	HFC 2-S	2 NPT	2	4.850	5.290	.670	

## Screw-On Straight and 90° Non-Metallic Connectors



For use with non-metallic liquid-tight conduit, type B. Produced from UV rated plastic for long outdoor life.



90° Item Number	Straight Item Number	For Conduit	Thread Size	Body and Sealing Nut				Carton Quantity
				A K.O. Size Inch	B Thread Length Inch	C O.A. Height Inch	D Height Inch	
NMSC9038	NMSC38	3/8	1/2 NPT	1/2	1.350	.535	1.100	100
NMSC9050	NMSC50	1/2			1.460			
NMSC9075	NMSC75	3/4	3/4 NPT	3/4	1.545	1.400		