


DIN RAILS



- All Din Rail supplied in 2 meter lengths
- All Din Rail is steel with yellow dichromate finish
- Standard packages of 20 pieces
- Priced per piece
- Rails to UNI 5961-67 standards,
- Sendzimir zinc plating.
- Thickness of covering = 8 microns
- Compliance with the following standards: DIN 46277, CENELEC EN50.022 / EN 50.023 / EN50.035.
- In according to Weee and RoHS directives.

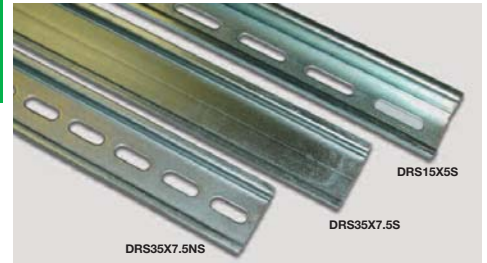


DRS35X7.5S

Part Number	Packing ft.	Packing m.
DRS35X7.5S	65	20

PLEASE CALL FOR PRODUCT AVAILABILITY

Perforated support rail in steel. Manufactured according to the following standards: DIN 46277 CENELEC EN 50.022. Length: 2m/6.56ft. bars

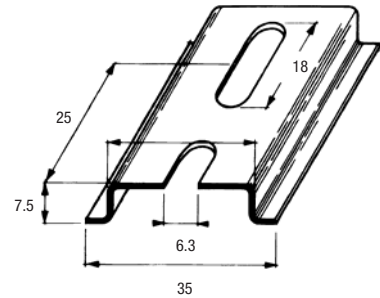


DRS35X15S

Part Number	Packing ft.	Packing m.
DRS35X15S	65	20

PLEASE CALL FOR PRODUCT AVAILABILITY

Perforated support rail in steel. Manufactured according to the CENELEC EN 50.022 standards. Length: 2m/6.56ft. bars

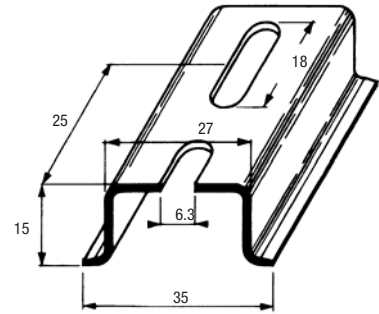


DRS35X7.5NS

Part Number	Packing ft.	Packing m.
DRS35X7.5NS	65	20

PLEASE CALL FOR PRODUCT AVAILABILITY

Support rail in steel for clip assembly of electrical equipment. Manufactured according to the following standards: DIN 46277 CENELEC EN 50.022. Length: 2m/6.56ft. bars




DRS35X15NS

Part Number	Packing ft.	Packing m.
DRS35X15NS	65	20

PLEASE CALL FOR PRODUCT AVAILABILITY

Support rail in steel for the clip assembly of electrical equipment. Manufactured according to the CENELEC EN 50.022 standards. Length: 2m/6.56ft. bars

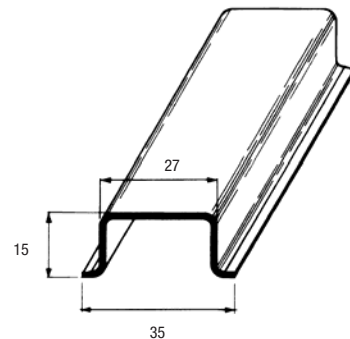

DIN Rail Accessories


Techspan offers a comprehensive array of DIN Rail accessories, carefully crafted to enhance your design capabilities and to put the crucial finishing touch on your designs.

Internal and External Jumpers are available in standard 2, 3, 4 and 10 pole assemblies for interconnection to distribute potentials within terminal block assemblies.

Marking Tags make DIN Rail assemblies easier to wire and facilitate troubleshooting. Techspan's extensive terminal block marking system includes standard or custom imprinted snap-on tags in a variety of sizes for circuit identification. The Techspan marking system offers two different versions of marking systems for printing of accessories.

DIN Rails are internationally standardized and available in 35mm, 32mm, and 15mm sizes, with or without perforations.

To help with your selection, the appropriate rail size for each terminal block is listed in the ordering information on each page. Additional selection and ordering information for DIN Rails can be found in the Accessories Section.

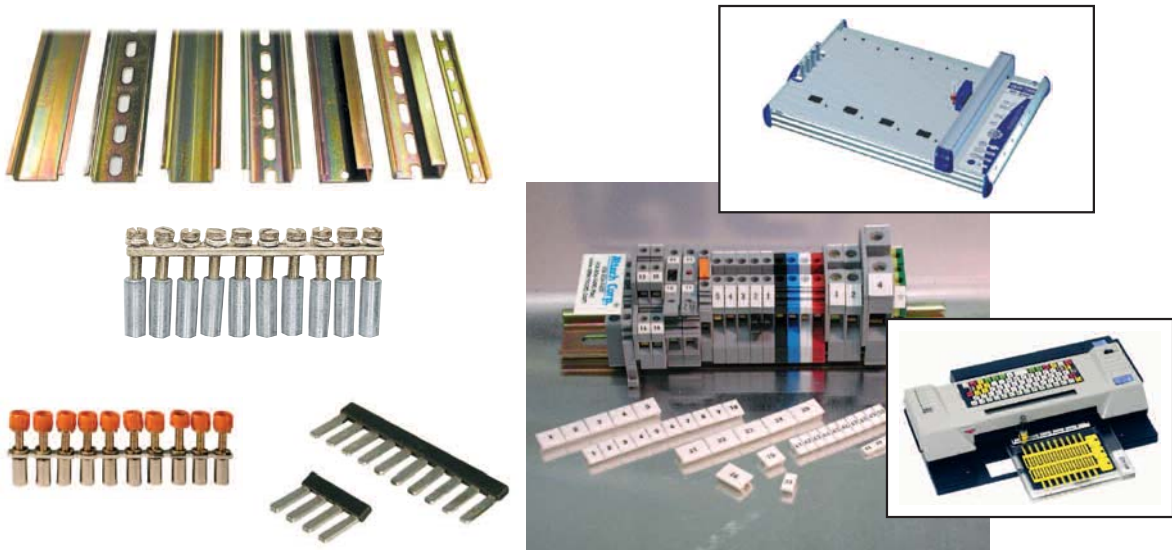

Last, but not least, the indispensable extras. End Stops prevent terminal blocks and other components from sliding laterally on the rail. End Plates close off the last terminal in a row of terminals. Isolation Partitions provide visual separation of terminal groups and ensure electrical isolation between adjacent terminals of different potentials. A wide selection of insulated and uninsulated ferrules is offered for your applications and whenever stranded flexible wires must be terminated.


K

SUPPORT BRACKETS

Support Brackets elevate DIN Rails away from the panel to facilitate component mounting and to increase wiring access. Angled brackets tilt the rail by 45° to improve visibility. Straight brackets are available in three heights for optimum positioning of the rail.

Brackets mount with 2 screws to any panel or flat surface and have tapped center holes for rail mounting. Bracket material is steel, zinc plated yellow chromated.


CA603

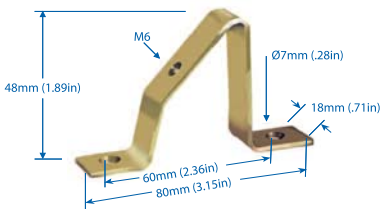

Suitable for all mounting rails

Cat. No.	Std. Pk.
CA603	25

TSTW



Complete with rail mounting hardware: including one screw & one locknut

Height	Cat. No.	Std. Pk.
1"	CA703	25
2"	CA803	25
3"	CA903	25

END STOPS

End Stops prevent terminal blocks and other DIN Rail mount components and devices from moving laterally on the rail. They are available in polyamide 6.6 and metal configurations for 35mm, 32mm, and 15mm DIN rails. CA102 and CA202 are large endstops for heavy duty applications. CA103 is a screwless endstop and snaps on to the DIN rail.

	CA102	CA202	CA702	CA802	CA602
Material	Polyamide 6.6	Polyamide 6.6	Polyamide 6.6	Polyamide 6.6	Polyamide 6.6
Dimensions H x L x W	46 x 50 x 9 mm	44.5 x 50 x 9.5 mm	34 x 44 x 9 mm	32 x 45 x 8 mm	20 x 28 x 8 mm
	Cat. No. CA102	Std. Pk. 50	Cat. No. CA202	Std. Pk. 50	Cat. No. CA602
	Std. Pk. 50	Cat. No. CA702	Std. Pk. 50	Cat. No. CA802	Std. Pk. 50
Suitable for	32 and 35 mm DIN Rails	35 mm DIN Rails	32 and 35 mm DIN Rails	35 mm DIN Rails	15 mm DIN Rails

	CA103	CA302	CA402	CA502
Material	Polyamide	Steel	Steel	Steel
Dimensions H x L x W	41 x 35 x 6 mm	27 x 39.5 x 16 mm	27 x 39.5 x 16 mm	25 x 22.5 x 11.5 mm
	Cat. No. CA103	Std. Pk. 50	Cat. No. CA302	Std. Pk. 50
	Std. Pk. 50	Cat. No. CA402	Std. Pk. 50	Cat. No. CA502
	Std. Pk. 50	Cat. No. CA502	Std. Pk. 50	
Suitable for	35 mm DIN Rails	35x7.5mm DIN Rails	35x15 mm DIN Rails	32 mm DIN Rails

SPACER / SEPARATOR

CASP is a DIN Rail mountable spacer generally used for circuit separation.

DIN RAIL MOUNTING FOOT

CMTB-35 is used to assemble components on a DIN rail. Comes with pre-punched holes.

- Support bracket for DIN rail mounting parts
- Hole Qty x dia., 4x4.3mm, 2x5mm

GROUP IDENTIFICATION

GMH6 & GMH7 is used for custom identification for assembled terminal blocks. A small piece of paper can be inserted in the slot which is covered with a transparent plastic sheet.

	CASP	CMTB-35	GMH6	GMH7
Material	Polyamide 6.6	Polyamide 6.6	Polyamide 6.6	Polyamide 6.6
Dimensions H x L x W	29 x 43 x 8 mm	18 x 58 x 18 mm	46.5 x 44.5 x 9.5 mm	46.5 x 44.5 x 19.5 mm
	Cat. No. CASP	Std. Pk. 50	Cat. No. GMH6	Std. Pk. 50
	Std. Pk. 50	Cat. No. GMH7	Std. Pk. 50	
Suitable for	All DIN Rails	Mounting Foot for 35 mm DIN rails	All DIN Rails	All DIN Rails

END PLATES & ISOLATION PARTITIONS

End Plates

End plates are used to cover the open side of sectional DIN Rail mount terminal blocks. They should be used at the end of an assembly of identical terminal blocks or whenever there is a change in the physical size of the terminal block.

- Material: polyamide 6.6
- Standard color: gray


Isolation Partitions

Isolation partitions provide separation between terminal blocks with different potentials. When used for DC power applications, voltages of up to $\pm 600V$ DC can be used on either side of the isolation partition. They also provide visual separation between groups of blocks.

- Material: polyamide 6.6
- Standard color: gray

Separator Plates


Used for electrical separation of adjacent jumpers. They can be inserted after the terminal blocks have been assembled on DIN rail. There is no loss of width.

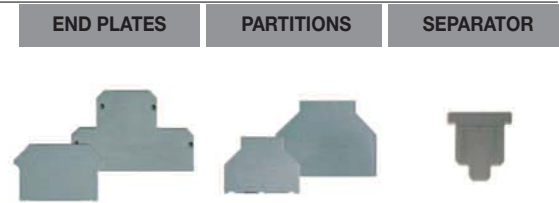

Terminal Block	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
CTS2.5UN/4UN/ CTT2.5UK/T/J	EP2.5/ 4UN	50	PP2.5/4UN	50	SP2.5/4UN	100
CTS6U/10U	EP6/10U	50	PP6/10U	50	SP6/10U	100
CTS16U					SP6/10U	100
CTS25U	EP25U	50	PP25U	50		
CTS35U	EP35U	50	PP35U	50		
CMT4/CM4S/CMT4SU	EPCMT4	50	PPCMT4	50		
CDL4U/4UIS/4U(O)/ Electronic TB	EPCDL4U	50			SPCDL4U	100
ODL4U (front)	EPODL4U	50				
ODL4U (back)	EP1ODL4U	50				
CSFL4U/CSDL4U/CSFL4U(L)	EPCSF4U	50	PPCSFL4U	50		
CSFL6U/CSDL6U	EPCSF6U	50				
DDFL4U/4U(E)/4U(E)LR/DDDL4U	EPDDFL4U	25				
CAFL4U/4U(L)/4U(N)	EPCAF4U	25				
CTL2.5U/CTL2.5U(L)	EPCTL2.5U	50				
CTL2.5UH/CTL2.5UH(L)	EPCTL2.5U-H	50				
CDTTU/CDTTU-SH	EPCDTTU	50				
CKT4U	EPCKT4U	50				
CTC4U	EPCTC4U	50				
CMC1-2	EPCMC1-2	50				
CMC2-2	EPCMC2-2	50				
CSTSN4U/N5U/B4U/B5U	EPCSTSN5U	50				
CSC2.5T/CSCG2.5T	EPCSC2.5T	50	PPCSC2.5T	50		
CSC4T/CSCG4T	EPCSC4T	50	PPCSC4T	50		
CSC6T/CSCG6T	EPCSC6T	50	PPCSC6T	50		
CSC10T/CSCG10T	EPCSC10T	50				
CSC2.5T1-2	EPCSC2.5T1-2	50				
CSC2.5T2-2	EPCSC2.5T2-2	50				
CSC4T1-2	EPCSC4T1-2	50				
CSC4T2-2	EPCSC4T2-2	50				
CSC6T1-2	EPCSC6T1-2	50				
CMB4	EPCMB4	50			SPCMB4	100
ADL2.5	EPADL2.5	50				
ASF4/ASF4L	EPASF4	50				

PROTECTIVE COVER / SIDE HOLDING PLATES

For protection against dust and shock, transparent protective cover can be installed above the terminal block assembly with the aid of side/holding plates. The side holding plates can be fitted on 35 mm and 32 mm Din rails. These plates should be backed by standard end stops.

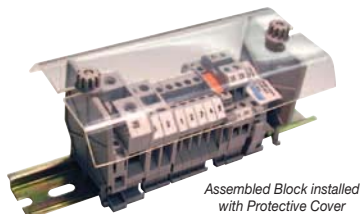

MARKING TAGS

The cost effective MT marking system provides quick and accurate identification. MT Push-On Marking Tags fit all Techspan DIN Rail mount and panel mount terminal blocks. They can be inserted individually or as strips of 10 tags on terminal block assemblies for quick and easy marking.

MT Marking Tags are supplied blank for custom marking or they can be ordered with a horizontal or vertical imprint. The standard tag color is white with black imprint. Tags can be ordered with up to 3 characters each. Imprints can be either consecutive or identical characters. MT tags, catalog numbers MT2-MT8 are supplied in packs of identical strips, 10 tags per strip. Catalog numbers MT10-MT15 are supplied in packs of identical strips, 5 tags per strip.

MT9F is a 90 mm continuous marking strip. It can be cut to specific lengths as desired.

Group marker MTG1 is used for group identification and can be fixed on the end stop CA702.


When ordering specify strip marking as a suffix; i.e. MT2/H-1-10.



Group Marker, shown imprinted and attached to CA 702. Blank and custom printing available. Cat. No. MTG1

Tags

Blank




Horizontal Tags

Consecutive Digits (Specify decade)
 Nos. 1-10, 11-20, etc. up to 100 *
 Nos. 101-110, etc. up to 999 *



Identical Characters (Specify digits, characters)
 Nos. 1, 2, 3 etc. up to 999 *
 Characters A, B, up to Z,
 Symbols +, -, ⊕ *




Vertical Tags

Consecutive Digits (Specify decade)
 Nos. 1-10, 11-20, etc. up to 100
 Nos. 101-110, etc. up to 999



Identical Characters (Specify digits, characters)
 Nos. 1, 2, 3 etc. up to 999
 Characters A, B, up to Z,
 Symbols +, -, ⊕

MT MARKING TAGS

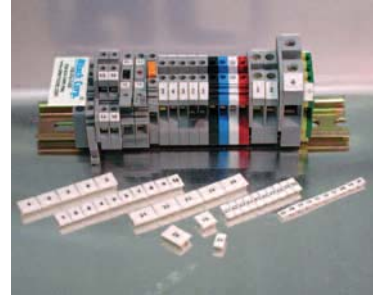

Cat. No.	Std. Pk.		Dimensions	
	Strips	Tags	H	W
MT2	10	100	4.9	5.8
MT3	20	100	5.0	10.0
MT4	10	100	5.0	4.8
MT5	10	100	9.4	4.5
MT6	10	100	9.4	5.5
MT8	10	100	10.4	7.3
MT9	10	100	10.3	8.7
MT9F	10	10	10.3	90.0
MT10	20	100	10.4	9.4
MT12	20	100	10.4	11.3
MT15	20	100	10.4	14.3
MT20	100	100	4.9	20
MT25	100	100	4.9	25

Cat. No.	Std. Pk.		Dimensions	
	Strips	Tags	H	W
MT2/H	10	100	4.9	5.8
MT3/H	20	100	5.0	10.0
MT4/H	10	100	5.0	4.8
MT5/H	10	100	9.4	4.5
MT6/H	10	100	9.4	5.5
MT8/H	10	100	10.4	7.3
MT9/H	10	100	10.3	8.7
MT9F/H	10	100	10.3	90.0
MT10/H	20	100	10.4	9.4
MT12/H	20	100	10.4	11.3
MT15/H	20	100	10.4	14.3
MT20/H	100	100	4.9	20
MT25/H	100	100	4.9	25

Cat. No.	Std. Pk.		Dimensions	
	Strips	Tags	H	W
MT2/V	10	100	4.9	5.8
MT3/V	20	100	5.0	10.0
MT4/V	10	100	5.0	4.8
MT5/V	10	100	9.4	4.5
MT6/V	10	100	9.4	5.5
MT8/V	10	100	10.4	7.3
MT9/V	10	100	10.3	8.7
MT9F/V	10	100	10.3	90.0
MT10/V	20	100	10.4	9.4
MT12/V	20	100	10.4	11.3
MT15/V	20	100	10.4	14.3
MT20/V	100	100	4.9	20
MT25/V	100	100	4.9	25



MARKING SYSTEMS
(continued)

Engraver VE500

The engraving unit was specifically designed to be used with the VP500 plotter. Changing back and forth between the pen-plotter and the engraver is easy. The engraver is meant to engrave plastic signs on double sided material, pre-cut or blank sheets, for legend plates, push button inlays, etc. The engraver is programmed by the VarioSign software for ease of use and design flexibility.



Engraving Needles

These engraving needles are to be used with the VE500 engraver. They have a 15° angle and are available in 6 tip widths or as a complete set.

Vacuum Cleaner Bag

Replacement bags for the VE500 engraver's vacuum cleaner

ENGRAVER VE500



Ordering Information

VE500 ENGRAVER UNIT COMPLETE34000040

ENGRAVING NEEDLE



Ordering Information

Product	Width	Order No.
Engraving Needle	0.20mm	35010003
Engraving Needle	0.30mm	35010002
Engraving Needle	0.40mm	35010001
Engraving Needle	0.50mm	35010000
Engraving Needle	0.70mm	35010004
Engraving Needle	1.00mm	35010005
Engraving Set(0.20, 0.30, 0.40, 0.50, 0.70, 1.00mm)		35010006

VACUUM CLEANER BAG



Ordering Information

VACUUM CLEANER BAG, SET OF 535020000



MARKING SYSTEMS ACCESSORIES

PLOTTER PENS

These "tubular-nib" pens are suitable for Vario Scriber VS 200, Vario Plotter VP 500 and all current labeling and identification systems with HP penholders. They are available in six tip widths identified by body color - 0.18 mm, 0.25 mm, 0.35 mm, 0.50 mm, 0.70 mm, and 1.00 mm; ink cartridge not supplied with pen. Special variants for other systems are available on request. Specially designed pre-filled felt-tip pens are available in a set of 4 colors (black, blue, red and green) and 2 sizes - 0.3 and 0.7 mm.



Product	Width	Order No.
EK Plotter Pen	0.18 mm	35001018
EK Plotter Pen	0.25 mm	35001025
EK Plotter Pen	0.35 mm	35001035
EK Plotter Pen	0.50 mm	35001050
EK Plotter Pen	0.70 mm	35001070
EK Plotter Pen	1.00 mm	35001100
EK Felt-tip Pen-Set	0.30 mm	35000005
EK Felt-tip Pen-Set	0.70 mm	35000010

INK CARTRIDGES

These are easy to insert "tubular-nib" pen cartridges containing special black ink suitable for marking, identifying and labeling various plastics. It is fast drying, smudge-proof, fade resistant, and resistant to chemicals when used on suitable plastic materials.



EK Ink Cartridge (5 pieces, Black)		35100006
---------------------------------------	--	----------

DISPOSABLE PENS

The disposable pens use the same special ink as used in the ink cartridges. They deliver the same outstanding durability and print quality as the standard plotter pens with the convenience of a disposable pen. These pre-filled pens allow for fast, efficient and cost effective printing without refilling ink or cleaning. They are available in two tip widths, 0.25 mm and 0.35 mm.



EK Disposable Plotter Pen	0.25 mm	35003025
EK Disposable Plotter Pen	0.35 mm	35003035

HAND PENS

The hand pens use the same special ink, as used in cartridges, and delivers the same outstanding durability and print quality. They are used for additional identification and special labeling tasks and are available in four tip widths of 0.25 mm, 0.35 mm, 0.50 mm, and 0.70 mm.



EK Hand Pen	0.25 mm	35002025
EK Hand Pen	0.35 mm	35002035
EK Hand Pen	0.50 mm	35002050
EK Hand Pen	0.70 mm	35002070



CLEANING UNIT

It is an easy-to-use cleaning unit developed specially for EK Pens. The cleaning unit enables the pens to be rinsed thoroughly while preventing skin contact with cleaning fluid or ink. The cleaning unit can be used for up to ten cleaning cycles. The necessary precautions must be taken when disposing of cleaning fluid, the cleaning unit can be reused.



EK Cleaning Unit		35100009
------------------	--	----------

PEN CLEANER

This cleaning solution comes in easy to handle cartridges and is used in conjunction with the cleaning unit. A standard pack consists of two pen cleaner cartridges. Cleaning can be performed on standard refillable pens only.



EK Pen Cleaner (2 pieces)		35100008
EK Cleaning Set (includes cleaning unit and pen cleaner)		35100010

ACCESSORIES

Jumpering System

The jumpering systems bus potentials between terminal blocks, reducing wiring time. Adjacent blocks or selective terminal blocks within an assembly can be easily interconnected, leaving terminal clamps free for wiring. Purchase complete assemblies, which are ready for installation, or select individual components to create custom or extra long jumpers. Jumper ampacity is lower than the rated current of the respective terminal blocks, therefore, applied current must not exceed the maximum current value of the block. Internal jumpers may be used in combination with external jumpers to achieve additional jumpering possibilities.

Internal Jumper Assemblies

Internal Jumper Assemblies consist of a Current Bar, Shorting Sleeves and screws. They install easily into the center of the terminal block and connect to the current bar. They are available as standard 2, 3, 4 or 10 pole assemblies and are ready for immediate installation.

Insulated internal jumpers provide shock protection when installed on terminal block assemblies.

External Jumpers

External Jumpers bus potentials between terminal blocks, reducing wiring time. Adjacent or selected blocks within an assembly can be easily interconnected. Jumper poles may be removed for selective jumpering. Jumpers are insulated and available in 2, 3, 4 and 10 pole versions. They are made of tin plated brass/copper.

Current Bars

Current Bars are offered to create custom jumper assemblies for increased number of poles or custom jumpers. Select the current bar with the required number of poles, or field cut them to the required length. They are made of tin or nickel plated copper or brass.

Shorting Sleeves & Screws

Shorting Sleeves & Screws ensure reliable and mechanically safe electrical connections between current bars and the terminal block current bars. One shorting sleeve is required for each jumpered terminal. They are made of nickel plated brass.

¹ Internal Jumpering System not available.

² 100 pole strip can be broken down to any number of poles desired.

INTERNAL JUMPER

INSULATED INTERNAL JUMPER



Terminal Series	Poles	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
CTS2.5U-N	2	CA721/2	100	CA741/2	100
	3	CA721/3	50	CA741/3	50
	4	CA721/4	50	CA741/4	50
	10	CA721/10	10	CA741/10	10
	100 ²	CA721/100	10	CA741/100	10
CTS4U-N	2	CA722/2	100	CA742/2	100
	3	CA722/3	50	CA742/3	50
	4	CA722/4	50	CA742/4	50
	10	CA722/10	10	CA742/10	10
	100 ²	CA722/100	10	CA742/100	10
CTS4U-TM	2	CA722/2	100	CA742/2	100
	3	CA722/3	50	CA742/3	50
	4	CA722/4	50	CA742/4	50
	10	CA722/10	10	CA742/10	10
	100 ²	CA722/100	10	CA742/100	10
CTS6U	2	CA723/2	100	CA743/2	100
	3	CA723/3	50	CA743/3	50
	4	CA723/4	50	CA743/4	50
	10	CA723/10	10	CA743/10	10
	CTS10U	2	CA724/2	100	CA744/2
3		CA724/3	50	CA744/3	50
4		CA724/4	50	CA744/4	50
10		CA724/10	10	CA744/10	10
CTS16U		2	CA751/2	50	CA761/2
	3	CA751/3	50	CA761/3	50
	4	CA751/4	50	CA761/4	50
	10	CA751/10	10	CA761/10	10
	CTS25U	2	CA725/2	50	CA745/2
3		CA725/3	25	CA745/3	25
4		CA725/4	25	CA745/4	25
10		CA725/10	10	CA745/10	10
CTS35U		2	CA726/2	50	CA746/2
	3	CA726/3	25	CA746/3	25
	4	CA726/4	25	CA746/4	25
	10	CA726/10	10	CA746/10	10
	CMT4	2	CA727/2	100	CA747/2
3		CA727/3	50	CA747/3	50
4		CA727/4	50	CA747/4	50
10 ²		CA727/10	10	CA747/10	10
100 ²		CA727/100	10	CA747/100	10
DDFL4U	2	CA729/2	100	CA749/2	100
	3	CA729/3	50	CA749/3	50
	4	CA729/4	50	CA749/4	50
	10	CA729/10	10	CA749/10	10
	CAFL4U ¹	2			
3					
4					
10					
CTL2.5U		2	CA722/2	100	
	3	CA722/3	50		
	4	CA722/4	50		
	10	CA722/10	10		
	100 ²	CA722/100	5		

10 (breakable)



Tel: (905) 820-6150 Toll Free: 1-800-363-1588
 Fax: (905) 820-6142 www.techspan.biz

EXTERNAL JUMPER		CURRENT BAR		SHORTING SLEEVE & SCREWS	
Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
CA717/2	100	CA703/01	100	CA707/S/Q/01	100
CA717/3	100	CA704/01	100	CA707/S/Q/01	100
CA717/4	100	CA705/01	100	CA707/S/Q/01	100
CA717/10	20	CA731/10	100	CA707/S/Q/01	100
		CA731/100	10	CA707/S/Q/01	100
CA713/2	100	CA703/1	100	CA707/S/Q/01	100
CA713/3	100	CA704/1	100	CA707/S/Q/01	100
CA713/4	50	CA705/1	100	CA707/S/Q/01	100
CA713/10	20	CA732/10	100	CA707/S/Q/01	100
		CA732/100	10	CA707/S/Q/01	100
		CA732/10-A	100	CA707/S/Q/01	100
CA710/2	100	CA703/2	100	CA707/S/Q/1	100
CA710/3	100	CA704/2	100	CA707/S/Q/1	100
CA710/4	100	CA705/2	100	CA707/S/Q/1	100
CA710/10	20	CA733/10	100	CA707/S/Q/1	100
CA718/2	100	CA703/3	100	CA707/S/Q/1	100
CA718/3	50	CA704/3	100	CA707/S/Q/1	100
CA718/4	50	CA705/3	100	CA707/S/Q/1	100
CA718/10	20	CA734/10	100	CA707/S/Q/1	100
		CA703/8	100	CA707/S/Q/5	100
		CA704/8	100	CA707/S/Q/5	100
		CA705/8	100	CA707/S/Q/5	100
		CA739/10	100	CA707/S/Q/5	100
		CA707/S/Q/5	100	CA707/S/Q/2	100
		CA707/S/Q/5	100	CA707/S/Q/2	100
		CA707/S/Q/5	100	CA707/S/Q/2	100
		CA707/S/Q/5	100	CA707/S/Q/2	100
		CA703/5	100	CA707/S/Q/2	100
		CA704/5	100	CA707/S/Q/2	100
		CA705/5	100	CA707/S/Q/2	100
		CA736/10	100	CA707/S/Q/2	100
CA714/2	100	CA703/1	100	CA607/S/Q	100
CA714/3	100	CA704/1	100	CA607/S/Q	100
CA714/4	50	CA705/1	100	CA607/S/Q	100
CA714/10	50	CA732/10	100	CA607/S/Q	100
		CA732/100	10		
		CA732/10-A	100		
CA711/2	100	CA703/6	100	CA707/S/Q/3	100
CA711/3	100	CA704/6	100	CA707/S/Q/3	100
CA711/4	50	CA705/6	100	CA707/S/Q/3	100
CA711/10	20	CA737/10	100	CA707/S/Q/3	100
CA716/2	50				
CA716/3	50				
CA716/4	50				
CA716/10	20				
CA715/2	100	CA703/1	100	CA707/S/Q/01	100
CA715/3	100	CA704/1	100	CA707/S/Q/01	100
CA715/4	100	CA705/1	100	CA707/S/Q/01	100
CA715/10	20	CA732/10	100	CA707/S/Q/01	100
		CA732/100	10	CA707/S/Q/01	100
		CA732/10-A	100	CA707/S/Q/01	100



**Spring Clamp
Terminal Block
Accessories**

ADJACENT JUMPER



ALTERNATE JUMPER



WIRE TYPE JUMPER




Terminal	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.	Cat. No.	Std. Pk.
CSC2.5T	CA801/1	100	CA801/1-3	100	CA901/1	100
CSC4T	CA801/2	100	CA801/2-3	100	CA901/2	100
CSC6T	CA801/3	100	CA801/3-3	100	CA901/3	100
CSC10T	CA801/4	100				
CSC2.5T1-2	CA801/1	100	CA801/1-3	100	CA901/1	100
CSC2.5T2-2	CA801/1	100	CA801/1-3	100	CA901/1	100
CSC4T1-2	CA801/2	100	CA801/2-3	100	CA901/2	100
CSC4T2-2	CA801/2	100	CA801/2-3	100	CA901/2	100
CSC6T1-2	CA801/3	100	CA801/3-3	100	CA901/3	100
CSCP2.5T	CA803/1	100				
CSCP2.5T2	CA803/1	100				
ADL2.5	CA801/1	100	CA801/1-3	100	CA901/1	100
ASF4	CA801/7	100				

**Step Down
Jumpers**

Used for jumpering different size blocks.

Cat. No.	Jumper for	Std. Pk.
CA901/4	CSC6T-CSC4T	100
CA901/5	CSC6T-CSC2.5T	100
CA901/6	CSC4T-CSC2.5T	100

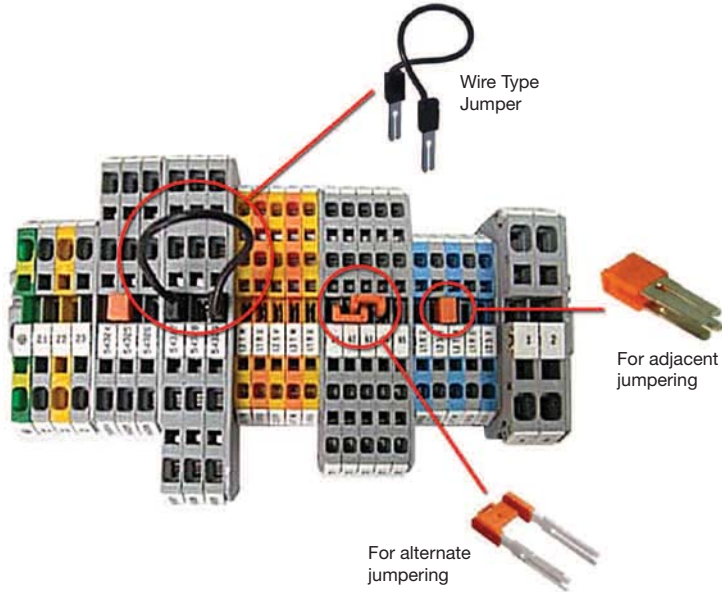

**Stud Type
Terminal Block
Jumpers**

Terminals	Poles	External Jumper	Std. Pk.	Poles	External Ring Jumper	Std. Pk.	
CSTSB4	[2	CA514/1-2	100	2	CA514/3-2	100
CSTSB5		3	CA514/1-3	50	3	CA514/3-3	50
CSTSN4		4	CA514/1-4	50	4	CA514/3-4	50
CSTSN5							

MOUNTING TRACKS
For Printed Circuit Boards
DIN Rail or Panel Mount

Mount standard or custom printed circuit boards in Mounting Tracks which can be conveniently DIN rail or panel mounted in your control panel or cabinet. These are the same tracks used for Techspan interface modules. We now make them available to you to house and protect your custom boards, etc. Tracks are easily cut to size or can be ordered pre-cut to specific lengths. They are easily assembled from standard components and snap onto 35mm DIN rail or can be panel mounted.

Each track has two sets of printed circuit board guides to accept two alternate board widths.

End Sections hold printed circuit boards securely in place and keep out foreign objects.

MOUNTING


When mounting extrusions on DIN rail, order two or more MTGF DIN Rail mounting feet. These feet slide into grooves on the extrusion. Then attach two EPDR DIN Rail Mount End Sections with help of EPS screws.

To panel mount, order two EPDP Panel Mount End Sections (and EPS screws), each with an integral mounting flange with a 6 x 8mm (.24 x .32 in.) hole slot.

If desired, tracks can be direct mounted using double sided tape. Order two EPDR End Sections (and EPS screws).

- Standard Lengths: 1m (3'-3") or 2m (6'-6")
- Track Material: PVC
- Temperature Limit:
 Short Term: 80°C (176°F)
 Continuous: 70°C (158°F)
- End Section, Foot Material: Polyamide
- Preassembled, Precut Lengths Available
- Tracks Accept Standard MT2 Marking Tags

MTGTK

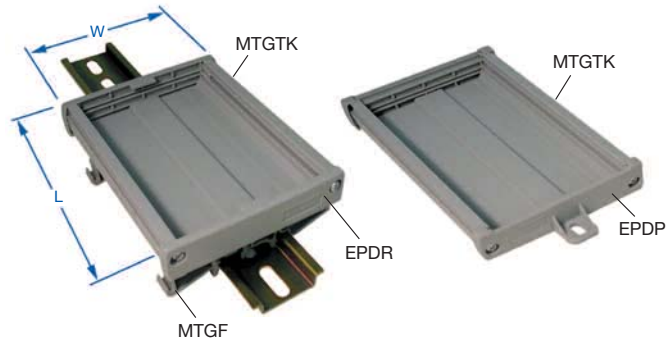

Mounting Track
Extrusion and Components

For PC Board Widths
 72.6mm (2.86) or 68.5mm (2.70)

	Cat. No.	Std. Pk.
Mounting Track		
1 meter	MTGTK/1M	5
2 meter	MTGTK	5
Accessories		
DIN Rail Mount End Section	EPDR	100
DIN Rail Mounting Foot	MTGF	100
Panel Mount End Section	EPDP	100
DIN Rail / Panel Mount End Section Screws #4x1/2", Phillips Pan head (2 required per end section)	EPS	200
Marking Tags	MT2	100

