

CABLE TIES


Techspan's Cable Ties are available in lengths from 4" to our exclusive 48" strap. Cable Ties will satisfy bundling requirements from 1/16" to 15" and loop tensile strengths from 18 to 175 pounds.

Cable Ties are stocked in materials, colors and fluorescents as listed. Contact your Techspan Distributor or Customer Service Representative for availability in special materials and colors.

Where applicable, Techspan Cable Ties are UL Recognized, Mil-Spec Approved and/or QPL Listed. Natural Ties are made of 6/6 nylon.

State-of-the-art robotic and raw material handling equipment assures product and material integrity throughout the manufacturing process. Overall quality is achieved through statistical analysis and quality driven operator objectives. Techspan has attained Mil-Spec I-45208 quality ratings from a number of equipment manufacturers.


Techspan products are sold through stocking Techspan Distributors.

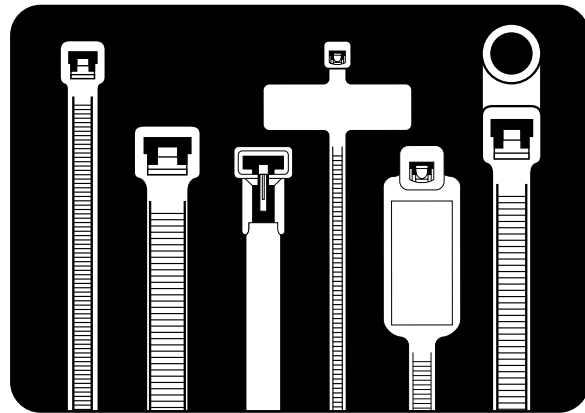

MINIATURE
INTERMEDIATE
STANDARD
MOUNTING HEAD
RESTRICTED BUNDLE

HEAVY DUTY
EXTRA HEAVY DUTY
STRIPED TIES
MIL-SPEC TIES
IDENTIFICATION TIES

RELEASABLE TIES



See
page 11 for
mil-specs


MINIATURE - SERIES 18

Fast Movers	Per Bag	Item Number	Material	Color	Bundle Diameter Inch (mm)	Length Inch (mm)	Width Inch (mm)	Minimum Loop Tensile LB (kg)
4"	100	L-4-18HS-0-C	Heat Stabilized Nylon	Black	1/16 - 5/8 (2 - 16)	4.0 (102)	.100 (3)	18 (8.2)
	1000	L-4-18HS-0-M						
	100	L-4-18-0-C	UV Nylon					
	1000	L-4-18-0-M						
	100	L-4-18-9-C	Nylon	Natural				
	1000	L-4-18-9-M						
	1000	L-4-18-1-M	Nylon Colors	Brown				
	1000	L-4-18-2-M		Red				
	1000	L-4-18-3-M		Orange				
	1000	L-4-18-4-M		Yellow				
	1000	L-4-18-5-M		Green				
	1000	L-4-18-6-M		Blue				
	1000	L-4-18-7-M		Purple				
	1000	L-4-18-8-M	Gray					
8"	100	L-4-18FL-11-C	Fluorescent Nylon	Pink	1/16 - 2 (2 - 51)	8.0 (202)		18 (8.2)
	1000	L-4-18FL-11-M						
	100	L-4-18FL-16-C		Orange				
	1000	L-4-18FL-16-M						
	100	L-4-18FL-17-C		Yellow				
	1000	L-4-18FL-17-M						
	100	L-4-18FL-18-C		Green				
	1000	L-4-18FL-18-M						
	100	L-4-18FL-20-C	Blue					
	1000	L-4-18FL-20-M						
	100	L-8-18-0-C	UV Nylon	Black				
	1000	L-8-18-0-M						
	100	L-8-18-9-C	Nylon	Natural				
	1000	L-8-18-9-M						

• Use QC-100, L-200 or L-400 Installation Tools

A

CABLE TIES




See
page 11 for
mil-specs

INTERMEDIATE - SERIES 30

Fast Movers	Per Bag	Item Number	Material	Color	Bundle Diameter		Length		Width		Minimum Loop Tensile		
					Inch	(mm)	Inch	(mm)	Inch	(mm)	LB	(kg)	
5.6"	100	L-5-30HS-0-C	Heat Stabilized Nylon	Black	1/16 - 1 1/4	(2 - 32)	5.6	(145)			30	(13.6)	
	1000	L-5-30HS-0-M											
	100	L-5-30-0-C	UV Nylon										
	1000	L-5-30-0-M											
	100	L-5-30-9-C	Nylon	Natural									
	1000	L-5-30-9-M											
	100	L-5-30-1-C	Nylon Colors	Brown									
	1000	L-5-30-1-M											
	100	L-5-30-2-C		Red									
	1000	L-5-30-2-M											
	100	L-5-30-3-C		Orange									
	1000	L-5-30-3-M											
	100	L-5-30-4-C		Yellow									
	1000	L-5-30-4-M											
	100	L-5-30-5-C		Green									
	1000	L-5-30-5-M											
	100	L-5-30-6-C		Blue									
	1000	L-5-30-6-M											
100	L-5-30-8-C	Gray											
1000	L-5-30-8-M												
8"	100	L-8-40HS-0-C	Heat Stabilized Nylon	Black	1/16 - 2	(2 - 51)	8.5	(215)		.130	(3)	40	(18.2)
	1000	L-8-40HS-0-M											
	100	L-8-40-0-C	UV Nylon										
	1000	L-8-40-0-M											
	100	L-8-40-9-C	Nylon	Natural									
	1000	L-8-40-9-M											
	100	L-8-40-1-C	Nylon Colors	Brown									
	1000	L-8-40-1-M											
	100	L-8-40-2-C		Red									
	1000	L-8-40-2-M											
	100	L-8-40-3-C		Orange									
	1000	L-8-40-3-M											
	100	L-8-40-4-C		Yellow									
	1000	L-8-40-4-M											
	100	L-8-40-5-C		Green									
	1000	L-8-40-5-M											
	100	L-8-40-6-C		Blue									
	1000	L-8-40-6-M											
	100	L-8-40-7-C		Purple									
	1000	L-8-40-7-M											
	100	L-8-40-8-C		Gray									
	1000	L-8-40-8-M											
	100	L-8-40FL-11-C	Fluorescent Nylon	Pink									
	1000	L-8-40FL-11-M											
	100	L-8-40FL-16-C		Orange									
	1000	L-8-40FL-16-M											
	100	L-8-40FL-17-C		Yellow									
	1000	L-8-40FL-17-M											
	100	L-8-40FL-18-C		Green									
	1000	L-8-40FL-18-M											
	100	L-8-40FL-20-C		Blue									
	1000	L-8-40FL-20-M											
												Not Rated	

(Continued)

CABLE TIES




See
page 11 for
mil-specs

A

INTERMEDIATE - SERIES 30

Per Bag	Item Number	Material	Color	Bundle Diameter		Length		Width		Minimum Loop Tensile	
				Inch	(mm)	Inch	(mm)	Inch	(mm)	LB	(kg)
100	L-11-40-0-C	UV Nylon	Black	1/16 - 3	(2 - 76)	11.5	(282)	.146	(4)	40	(18.2)
500	L-11-40-0-D										
100	L-11-40-9-C	Nylon	Natural								
500	L-11-40-9-D										
100	L-14-40-0-C	UV Nylon	Black	1/16 - 4	(2 - 102)	14.5	(358)				
500	L-14-40-0-D										
100	L-14-40-9-C	Nylon	Natural								
500	L-14-40-9-D										

- Use QC-100, L-200 or L-400 Installation Tools




STANDARD - SERIES 50

Fast Movers	Per Bag	Item Number	Material	Color	Bundle Diameter		Length		Width		Minimum Loop Tensile						
					Inch	(mm)	Inch	(mm)	Inch	(mm)	LB	(kg)					
7.5"	100	L-5-50HS-0-C	Heat Stabilized Nylon	Black	1/16 - 1	(2 - 25)	5.5	(140)	.187	(5)	50	(22.7)					
	1000	L-5-50HS-0-M															
	100	L-5-50-0-C	UV Nylon														
	1000	L-5-50-0-M															
	100	L-5-50-9-C	Nylon	Natural													
	1000	L-5-50-9-M															
	100	L-7-50HS-0-C	Heat Stabilized Nylon	Black	1/16 - 1 3/4	(2 - 44)	7.5	(193)					.187	(5)	50	(22.7)	
	1000	L-7-50HS-0-M															
	100	L-7-50-0-C	UV Nylon														
	1000	L-7-50-0-M															
	100	L-7-50-9-C	Nylon	Natural													
	1000	L-7-50-9-M															
	100	L-7-50-2-C	Nylon Colors	Red													
	1000	L-7-50-2-M		Orange													
	100	L-7-50-3-C		Yellow													
	1000	L-7-50-3-M		Green													
	100	L-7-50-4-C		Blue													
	1000	L-7-50-4-M		Purple													
	100	L-7-50-5-C		Gray													
	1000	L-7-50-5-M															
	100	L-7-50-6-C	Fluorescent Nylon	Pink					Not Rated								
	1000	L-7-50FL-11-M		Orange													
	100	L-7-50FL-16-C		Yellow													
	1000	L-7-50FL-16-M		Green													
	100	L-7-50FL-17-C															
	1000	L-7-50FL-17-M															
	100	L-7-50FL-18-C															
	1000	L-7-50FL-18-M															
	100	L-7-50FL-20-C	Blue														
	1000	L-7-50FL-20-M															

(Continued)

CABLE TIES

See
page 11 for
mil-specs




STANDARD - SERIES 50

Fast Movers	Per Bag	Item Number	Material	Color	Bundle Diameter Inch (mm)	Length Inch (mm)	Width Inch (mm)	Minimum Loop Tensile LB (kg)	
11"	100	L-11-50HS-0-C	Heat Stabilized Nylon	Black	1/16 - 3 (2 - 76)	11.1 (282)	.187 (5)	50 (22.7)	
	500	L-11-50HS-0-D							
	100	L-11-50-0-C	UV Nylon						
	500	L-11-50-0-D							
	100	L-11-50-9-C	Nylon	Natural					
	500	L-11-50-9-D							
	100	L-11-50-2-C		Red					
	500	L-11-50-2-D							
	100	L-11-50FL-11-C	Fluorescent Nylon	Pink					
	500	L-11-50FL-11-D							
	100	L-11-50FL-16-C		Orange					
	500	L-11-50FL-16-D							
	100	L-11-50FL-17-C		Yellow					
	500	L-11-50FL-17-D							
	100	L-11-50FL-18-C		Green					
500	L-11-50FL-18-D								
100	L-11-50FL-20-C	Blue							
500	L-11-50FL-20-D								
14"	100	L-14-50HS-0-C	Heat Stabilized Nylon	Black	1/16 - 4 (2 - 102)	14.1 (358)	50 (22.7)		
	500	L-14-50HS-0-D							
	100	L-14-50-0-C	UV Nylon						
	500	L-14-50-0-D							
	100	L-14-50-9-C	Nylon	Natural					
	500	L-14-50-9-D							
	500	L-14-50-2-D		Red					
	100	L-14-50-6-C							
	500	L-14-50-6-D		Blue					


- Use QC-100, L-200 or L-400 Installation Tool
- L-11-50-XD and L-14-50 now available in all solid colours

CABLE TIE INSTALLATION TOOLS




QC-100

A lightweight tool for least critical applications. Cinch tie to desired bundle and twist tool to remove excess strap. Recommended for use with 18 - 50 pound ties.




L-400

Heavy Duty tool for use with 18 - 50 pound ties. Automatic cut-off and adjustable tensioning for dependable use in assembly applications.



L-200

Economy tool for use with 18 - 50 pound ties. Automatic cut-off removes excess strap flush against cable tie head. Tool is equipped with adjustable tensioning.



L-300

Rugged construction makes this tool ideal for use with our 120 - 175 pound ties. Cinch tie to desired bundle and pull trigger to cut excess flush at Cable Tie head. Field proven durability.