





RSF SERIES ALUMINUM FLAT CABLE CORD GRIPS

Tuff-Seal RSF Series Aluminum Cord Grips are specially designed and molded for heavy-duty, flat cable or festoon system applications. Unique to the US market, these cord grips are used in place of the traditional two-screw connector at the critical point of termination between the plant environment and the internal wiring of the festoon system. With this Flat Cable Cord Grip users can place multiple cables through one connector saving both labor time cost by eliminating the need for multiple termination and multiple connectors.

Manufactured for use in both indoor and outdoor locations, these Tuff-Seal Flat Cable grips seal out dirt, moisture, coolants, lubricant and corrosives. They are available in machined aluminum, steel, stainless steel and nylon with either M style (ISO), Pg or NPT threads. RSF Series Grips can be customized based on the number and size conductors utilized in a specific application.

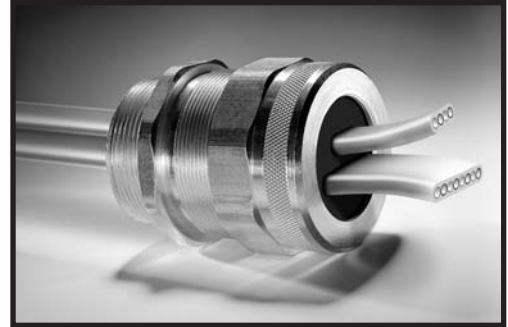

**GREAT
FOR FESTOON
CABLE**



Conduit Size	Complete Assembly	Body, Nut, Washer Assembly	Bushing Only	Bushing Dimensions	(hole size)	Number of Holes
1"	RSF-3001 RSF-3002 RSF-3003	RSR-300-W	SBF-3001 SBF-3002 SBF-3003	.66 x .24 .75 x .25 .89 x .29		
1 1/4"	RSF-4001 RSF-4002 RSF-4003 RSF-4004 RSF-4005 RSF-4006 RSF-4007 RSF-4008 RSF-4009 RSF-4010 RSF-4011 RSF-4012	RSR-400-W	SBF-5001 SBF-5002 SBF-5003 SBF-5004 SBF-5005 SBF-5006 SBF-5007 SBF-5008 SBF-5009 SBF-5010 SBF-5011 SBF-5012	1.19 x .35 1.37 x .25 1.24 x .24 1.13 x .22 1.24 x .24 1.13 x .22 .66 x .24 .66 x .24 .89 x .29 .89 x .29 .75 x .25 .75 x .25	1.13 x .22 1.24 x .24 1.13 x .22 1.24 x .24	2 holes 2 holes 2 holes 2 holes 2 holes 2 holes 2 holes
1 1/2"	RSF-5001 RSF-5002 RSF-5003 RSF-5004 RSF-5005 RSF-5006 RSF-5007 RSF-5008 RSF-5009 RSF-5010 RSF-5011 RSF-5012	RSR-500-W	SBF-5001 SBF-5002 SBF-5003 SBF-5004 SBF-5005 SBF-5006 SBF-5007 SBF-5008 SBF-5009 SBF-5010 SBF-5011 SBF-5012	1.19 x .35 1.37 x .25 1.24 x .24 1.13 x .22 1.24 x .24 1.13 x .22 .66 x .24 .66 x .24 .89 x .29 .89 x .29 .75 x .25 .75 x .25	1.13 x .22 1.24 x .24 1.13 x .22 1.24 x .24	2 holes 2 holes 2 holes 2 holes 2 holes 2 holes 2 holes
2"	RSF-6001 RSF-6002 RSF-6003 RSF-6004 RSF-6005 RSF-6006 RSF-6007	RSR-600-W	SBF-6001 SBF-6002 SBF-6003 SBF-6004 SBF-6005 SBF-6006 SBF-6007	1.71 x .50 1.46 x .45 1.77 x .24 1.65 x .22 1.77 x .24 1.65 x .22 1.37 x .25		2 holes 2 holes 2 holes

Connectors are available in machined aluminum, steel, stainless steel, and nylon fittings. Threads can be supplied as M style (ISO), Pg or NPT. Remke will manufacture connectors and bushings to customer-specific dimensions and applications. **Custom configurations and sizes are available. Consult factory.**