


# NEW PRODUCT LAUNCH


# TECHSPAN TECK

# CONNECTORS

These “CHST” and “TMCX” cable fittings are designed to effectively and efficiently terminate TECK cable in ordinary and hazardous locations. Applications for these fittings include: pulp and paper mills, chemical and petrochemical plants, petroleum refineries, waste treatment facilities, mining facilities power generating plants, grain handling and storage facilities and many other industrial applications..

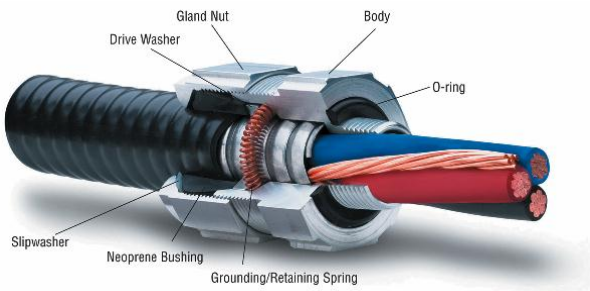

“CHST” Series TECK Connector

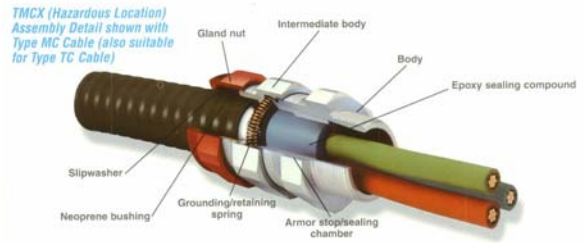

*TMCX (Hazardous Location) Assembly Detail shown with Type MC Cable (also suitable for Type TC Cable)*

TSC1 / TSC4 EPOXY COMPOUND

“TMCX” Hazardous Series TECK Connector

**FEATURES INCLUDE: CSA Certified, Copper-free aluminum — natural, Unique stainless steel grounding spring, Environmental seal, Compact design, Large wrenching flats, Watertight seal.**

#### CERTIFICATIONS AND COMPLIANCE'S

##### “CHST” series

- CEC: Class II, Division 1 and 2, Groups E, F and g Class III
- CSA Standard: C22.2 No. 18

##### “TMCX” series

- CSA Std. C22.2 No. 18, 174 Class I, A,B,C,D SL
- Class II, E,F,G
- Class III, Enc. 4 locations

**TECHSPAN®**  
INDUSTRIES | INC.

3131 Pepper Mill Ct., Mississauga, Ont., L5L-4X6  
Tel: 905-820-6150; Fax: 905-820-6142  
Toll: 1-800-363-1588; Web: [www.techspan.on.ca](http://www.techspan.on.ca)  
Email: [sales@techspan.on.ca](mailto:sales@techspan.on.ca)

Jan/2002

TECK Connector Selection Sheet

Cat #	Description	Ctn/Qty
CHST050462	1 / 2" HUB O.D. CBL 0.525"-0.65"	20
CHST050464	1 / 2" HUB O.D. CBL 0.6"-0.76"	20
CHST050465	1 / 2" HUB O.D. CBL 0.725"-0.885"	20
CHST050466	1 / 2" HUB O.D. CBL 0.825"-0.985"	20
CHST075467	3 / 4" HUB O.D. CBL 0.88"-1.065"	10
CHST075468	3 / 4" HUB O.D. CBL 1.025"-1.205"	10
CHST100469	1" HUB O.D. CBL 1.187"-1.375"	10
CHST125470	1 1/4" HUB O.D. CBL 1.35"-1.625"	5
CHST125471	1 1/4" HUB O.D. CBL 1.6"-1.875"	5
CHST125550	1 1/4" HUB O.D. CBL 1.5"-1.625"	5
CHST150472	1 1/2" HUB O.D. CBL 1.7"-1.965"	5
CHST150473	1 1/2" HUB O.D. CBL 1.9"-2.187"	5
CHST200474	2" HUB O.D. CBL 2.1"-2.375"	5
CHST200475	2" HUB O.D. CBL 2.3"-2.565"	5
CHST200476	2" HUB O.D. CBL 2.5"-2.75"	5
CHST200551	2" HUB O.D. CBL 1.9"-2.187"	5
CHST250477	2 1/2" HUB O.D. CBL 2.38"-2.64"	5
CHST250478	2 1/2" HUB O.D. CBL 2.58"-2.84"	5
CHST300479	3" HUB O.D. CBL 2.79"-3.06"	2
CHST300480	3" HUB O.D. CBL 3"-3.27"	2
CHST300481	3" HUB O.D. CBL 3.21"-3.48"	2
CHST350482	3 1/2" HUB O.D. CBL 3.42"-3.69"	2
CHST350483	3 1/2" HUB O.D. CBL 3.61"-3.87"	2
CHST400484	4" HUB O.D. CBL 3.81"-4.03"	2
CHST400485	4" HUB O.D. CBL 3.965"-4.185"	2
CHST400486	4" HUB O.D. CBL 4.12"-4.34"	2
TMCX10402	HL 4" HUB O.D. ARM. 3.500"-4.020"	1
TMCX165	HL 1/2" HUB O.D. ARM. .440"-.650"	10
TMCX285	HL 3/4" HUB O.D. ARM. .600"-.850"	10
TMCX3112	HL 1" HUB O.D. ARM. .800"-1.120"	5
TMCX4140	HL 1 1/4" HUB O.D. ARM. 1.100"-1.400"	5
TMCX5161	HL 1 1/2" HUB O.D. ARM. 1.330"-1.610"	4
TMCX6206	HL 2" HUB O.D. ARM. 1.570"-2.060"	4
TMCX7247	HL 2 1/2" HUB O.D. ARM. 1.930"-2.470"	2
TMCX8302	HL 3" HUB O.D. ARM. 2.450"-3.020"	2
TMCX9352	HL 3 1/2" HUB O.D. ARM. 2.950"-3.520"	1
TSC1	EPOXY SEAL'G COMPOUND 1 o.z	10
TSC4	EPOXY SEAL'G COMPOUND 4 o.z.	5
11A	ALUM. LOCK NUT 1/2"	50
12A	ALUM. LOCK NUT 3/4"	50
13A	ALUM. LOCK NUT 1"	25
14A	ALUM. LOCK NUT 1 1/4"	25
15A	ALUM. LOCK NUT 1 1/2"	10
16A	ALUM. LOCK NUT 2"	10
17A	ALUM. LOCK NUT 2 1/2"	5
18A	ALUM. LOCK NUT 3"	2
19A	ALUM. LOCK NUT 3 1/2"	2
20A	ALUM. LOCK NUT 4"	2

Highlighted items represent Stocked items