

LOW VOLTAGE

LOW VOLTAGE SPEC SHEET - TAN

TAN SEALANT FILLED WIRE CONNECTORS FOR ALL BELOW GRADE LOW VOLTAGE INSTALLATIONS.

TAN - LOW VOLTAGE

PRODUCT SPECIFICATIONS

MAX. VOLTAGE: 30V / 10 AMP

SIZE: 13/16" x 1-9/16"

WIRE COMBINATIONS: Copper/Copper

WIRE RANGE: Min. #22 / Max. #6

TEMPERATURE RATING: 75°C (167°F)


PETROLEUM BASED SEALANT: -29°F to 250°F



TAN - LOW VOLTAGE

MEASUREMENTS (INCHES)

A - 1.563 B - 0.516 C - 0.813 D - 0.656

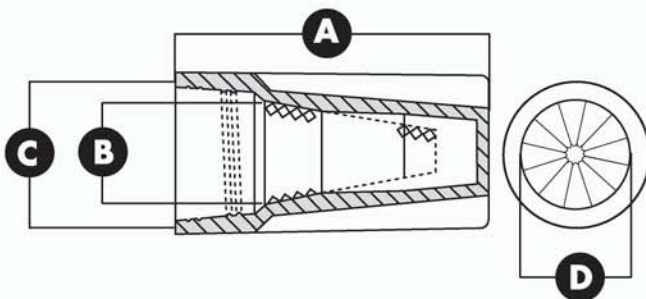

WIRE COMBINATIONS

See complete listing on reverse.

INSTALLATION INSTRUCTIONS



IMPORTANT: Turn off power before installing or removing connector. Product to be used in accordance with local and national codes.

1. Strip wires 1/2".
2. Align frayed strands or conductors.
3. NO pre-twisting needed. Hold wires together with ends even. Note: Twist and lead stranded wires slightly.
4. Push wires firmly into connector when starting.
5. Twist connector onto wires pushing firmly until tight. DO NOT over torque. DO NOT REUSE.



KING
INNOVATION™

3801 Lloyd King Drive, St. Charles, MO 63304

(800) 633-0232 In Missouri (636) 519-5400 Fax: (636) 519-5410

e-mail: sales@kinginnovation.com

www.kinginnovation.com

Toll Free: 1-800-633-0232

In Missouri: (636) 519-5400

FAX: (636) 519-5410

WIRE COMBINATIONS

LOW VOLTAGE - TAN

TAN LOW VOLTAGE WIRE COMBINATIONS

30V / 10 AMP

3-6 #22	3 #18 w/1-3 #12, 14 or 16	2 #14 w/1-2 #12
2-6 #18 or 20	3 #18 w/1-2 #10	2 #14 w/1 #8 or 10
1-6 #14 or 16	4 #18 w/1-2 #12, 14 or 16	3 #14 w/1 #10 or 12
1-3 #10 or 12	4 #18 w/1 #10	3 #14 w/2 #12
4 #12 solid	5 #18 w/1 #14 or 16	4 #14 w/1 #12
1 #6	1 #16 w/1-4 #12 or 14	1 #12 w/1 #8 or 10
1 #22 w/2-5 #20	1 #16 w/1-2 #10	2 #12 w/1 #10
1 #22 w/1-5 #16 or 18	2 #16 w/1-4 #14	1 #22 w/1 #16 & 18
2 #22 w/1-4 #16, 18 or 20	2 #16 w/1-3 #12	1 #22 w/1-2 #16 & 1 #20
3 #22 w/1-3 #16, 18 or 20	2 #16 w/1-2 #10	1 #16 w/1 #10 or 12 & 1-2 #14
4 #22 w/1-2 #16, 18 or 20	3 #16 w/1-3 #14	1-2 #16 w/1 #10 & 12
1 #20 w/1-4 #14, 16 or 18	3 #16 w/1-2 #10 or 12	2 #16 w/1-2 #12 & 1 #14
2 #20 w/1-3 #14, 16 or 18	4 #16 w/1-2 #12 or 14	2 #16 w/1 #12 & 2 #14
3 #20 w/1-2 #14, 16 or 18	4 #16 w/1 #10	3 #16 w/1 #10 or 12 & 1 #14
4 #20 w/1-2 #14, 16 or 18	5 #16 w/1 #14	4 #16 w/1 #10 & 12
1 #18 w/1-4 #12 or 14	5 #16 solid w/1 #10 solid	2 #14 w/1 #10 & 1-2 #12
1-2 #18 w/1-2 #10	1 #14 solid w/1-3 #12	2 #14 w/1 #10 & 12
2 #18 w/1-4 #12, 14 or 16	1 #14 w/1-2 #10	