



REV	DESCRIPTION	Date	APPROVED
A	ENGINEERING RELEASE	07/31/06	
B	MODIFY LABEL	02/02/07	
C	UPDATE TITLE BLOCK	09/12/07	

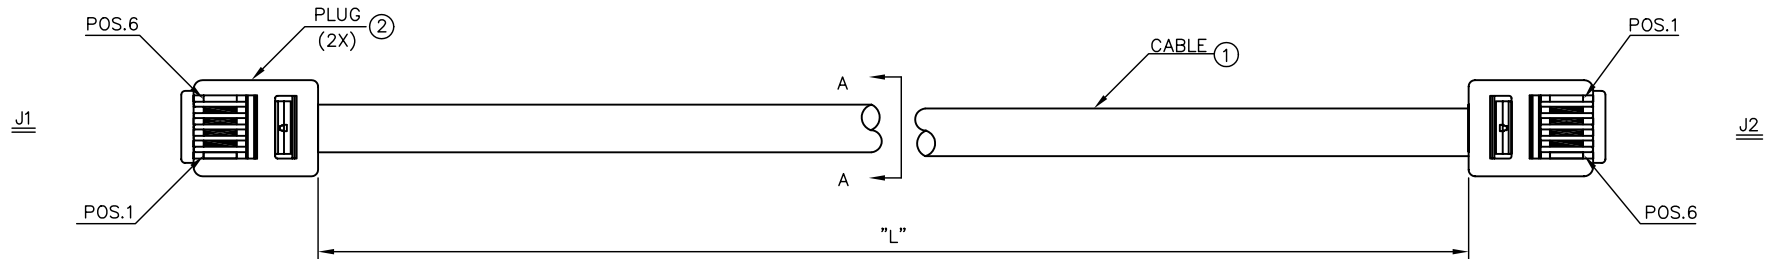

SEC: A-A

6	1	
5	2	
4	3	
3	4	
2	5	
1	6	
J1	WIRE COLOR	J2

WIRE CONNECTION TABLE

ITEM NO	WIRE LENGTH "L"	UPC NUMBER
GCLA466050	15250±150 (50')	677142043242
GCLA466025	7625±50 (25')	677142043235
GCLA466014	4270±30 (14')	677142043228
GCLA466007	2135±20 (7')	677142043211

NO.	ITEM	Q'TY	DESCRIPTION
2	PLUG	2PCS	6P4C 3U" "CBS" MARKING ON THE PLUG
1	CABLE	1PC	UL STYLE 20251, CSAII A/B CONDUCTOR: [28AWG(0.12/7)BARE TWIST COPPER]X4C INSULATION: [6331PP ID: 0.95±0.03]X4C JACKET: PVC UL 65P CABLE MARKING: EXXXXXX CABLESYS AWM 20251 60°C 150V 28AWG (EXXXXXX: VENDER APPROVED UL FILE NUMBER) COLOR OF MARKING: WHITE

NOTE: UNLESS OTHERWISE SPECIFIED

1. PACKAGING:

- A. EACH LINE CORD BUNDLED WITH A CABLE TIE TWISTED IN THE MIDDLE
- B. 1 PC/BAG, TYPE I, SIZE A, PRINTING & LABELING PER PKBAG
- C. OUTER BAG: 50 PCS/OUTER BAG, SIZE TO FIT, LABELING PER PKBAG
- D. MASTER CARTON: SIZE: 457 X 340 X 245 MM PRINTING AND LABELING PER PKCARTON

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		CABLESYS			
DECIMALS	ANGULAR	14700 E ALONDR A BLYD, LA MIRADA, CA 90638 WWW.CABLESYS.COM			
.X +/- .050	+/- 0.5	28WG LINE CORD 4C 6P/6P			
.XX +/- .010		DESIGNER	T.L.	SIZE	A
.XXX +/- .005		DRAFTSMAN	CHEN ZHI GANG	UNIT	MM
DO NOT SCALE DRAWING		FILE NO.	OFF SHELF CABLE\GCLA466XXX	REV.	C
		PAGE NO.	1/1	ITEM NO.	GCLA466XXX
		DATE	07/31/06	DWG NO.	LA466XXX

Approved by: _____ Title: _____ Date: _____