

# GenSPEED® 6000 CATEGORY 6 CABLE OUTSIDE PLANT

## STANDARD COMPLIANCES

- ANSI/TIA/EIA 568B.2-1 (Category 6)
- ISO 11801 (Category 6)
- ICEA S-102-700 (Category 6)
- MIL-C-24640A Water Penetration Requirement




## APPLICATIONS

- Data transmission rates up to 2.4 Gb/s
- 1000 BASE-T (Gigabit Ethernet)
- 100/10 BASE-T (IEEE 802.3)
- 52/155 Mbps ATM
- Aerial, Duct and Buried Installations

## PRODUCT NUMBERS

Product Number	Jacket Color	Armor	O.D. (inches)	Weight (lb/Kft)
7136100	Black	None	0.230	25

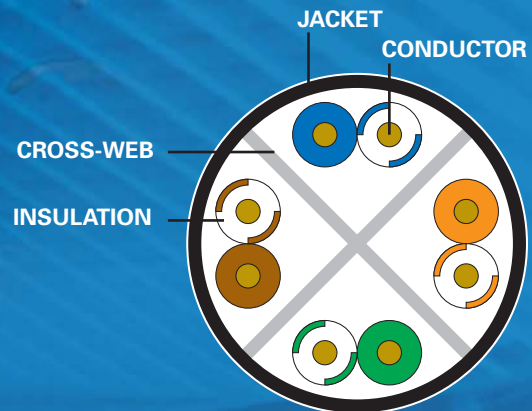

## ELECTRICAL CHARACTERISTICS

<b>DC Resistance</b> (max) Ohms/100m (328ft) @ 20°C	9.38
<b>DC Resistance Unbalance</b> (max) Individual Pair %	3.0
<b>Delay Skew</b> (max) ns/100m	45
<b>Nom. Velocity of Propagation</b> % Speed of Light	69
<b>Characteristic Impedance</b> Frequency (f): 1-250 MHz	Ohms 100 ± 15
<b>Input Impedance</b> Frequency (f): 1.0-100 MHz 100-250 MHz	Ohms 100 ± 15 100 ± 22

## CONSTRUCTION

### Conductors

- 4 pairs of 23 AWG solid bare annealed copper

### Insulation

- Polyolefin

### Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

### Separator

- Cross-web

### Flooding Compound

- Waterproof gel prevents moisture migration

### Jacket

- Black UV and abrasion-resistant Polyethylene (PE)
- TRU-Mark™ print legend contains footage marking from 1000' to 0'

### Temperature Rating

- -70°C to +75°C

### Packaging

- 1000' Reel

## ELECTRICAL PERFORMANCE

Frequency MHz	PSACR (min)	ACR (min)	Attenuation (max)	PSNEXT (min)	NEXT (min)	PSELFEXT (min)	ELFEXT (min)	Return Loss (min)
<b>0.772</b>	72.2	74.2	1.8	74.0	76.0	67.0	70.0	-
<b>1</b>	70.3	72.3	2.0	72.3	74.3	64.8	67.8	20.0
<b>4</b>	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0
<b>10</b>	51.3	53.3	6.0	57.3	59.3	44.8	47.8	25.0
<b>16</b>	47.0	49.0	7.6	54.3	56.3	40.7	43.7	25.0
<b>20</b>	44.3	46.3	8.5	52.8	54.8	38.8	41.8	25.0
<b>31.25</b>	39.2	41.2	10.7	49.9	51.9	36.8	37.9	23.6
<b>62.5</b>	30.0	32.0	15.4	45.4	47.4	28.9	31.9	21.5
<b>100</b>	22.5	24.5	19.8	42.3	44.3	24.8	27.8	20.1
<b>200</b>	9.0	11.0	29.0	37.8	39.8	18.8	21.8	18.0
<b>250</b>	3.5	5.5	32.8	36.3	38.3	16.8	19.8	17.3

Note: Values are expressed in dB per 100m (328ft.) length.

Data subject to change without notice.