


Multiple Pair Aerial Service Wire

Spec. 4298

BELL SYSTEM TYPE

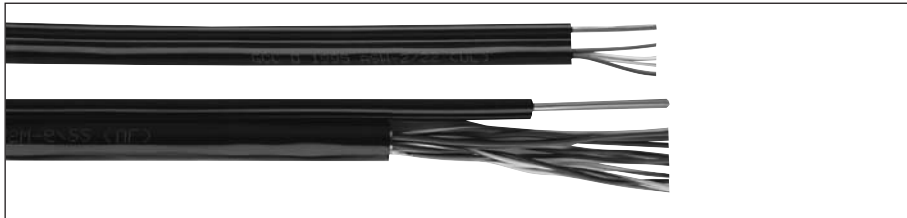

Nominal Cable Data

CATALOG NUMBER	PAIRS AWG	O.D. (INCHES)	WEIGHT (LBS/MFT)	STANDARD LENGTH (FT)
2091018	2/22	0.30 x 0.50	54	600 CL
2091019	2/22	0.30 x 0.50	54	5000 RL
2091021	6/22	0.35 x 0.55	78	400 CL
2091015	6/22	0.35 x 0.55	78	500 RL
2091016	6/22	0.35 x 0.55	78	3500 RL

Data subject to change without notice. Contact your Customer Service Representative for latest information.

Product Construction:

Conductors:

- 22 AWG solid annealed copper

Insulation:

- Color-coded high density polyethylene

Jacket:

- The pairs and a .083" diameter galvanized steel messenger are enclosed in a black flame-retardant, weather- and abrasion-resistant PVC jacket in a Figure 8 configuration

Application(s):

- Provides multiple line telecommunication service connection to the subscriber

Compliance:

- Telcordia (Bellcore) Specification TR-NWT-000122

Packaging:

- Available in coils (CL) and reels (RL)

