
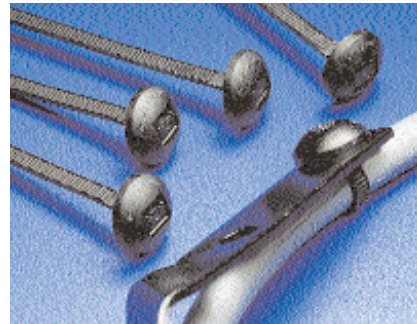


Button Head Ties

Manufactured from black, high impact nylon 6/6, the button head tie is a two piece tie providing for parallel entry and exit through the head. The strap contains serrations on both sides and the head has two opposed pawls covered by a spherical dome top.

This design allows the strap to be directed clockwise or counter-clockwise prior to insertion into the head, enabling bi-directional looping.

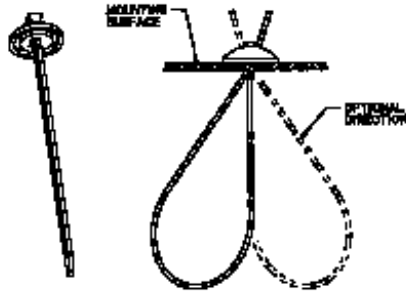


U.S. Patent Number 4,557,023

Button Head Ties							
HellermannTyton Part No.	Material/Color	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
BT1000HIRK2	High Impact, Nylon 6/6, Black	100	2-5/8" (66.67)	9-5/8" (244.47)	.22" (5.58)	100	TWT2, T150, MK6PN, MK9
BT100L0HIRK2		100	4-5/16" (109.53)	15" (381.0)	.22" (5.58)	50	
BT120L0HIRK2		120	4-11/32" (110.49)	15" (381.0)	.30" (7.62)	50	
BT120R0HIRK2		120	2-29/32" (73.66)	10-1/2" (266.0)	.30" (7.62)	50	

Button Head Ties with Retainers

Similar to standard button head ties, these ties feature retainer arrows for use with HellermannTyton's MSBT120 saddle mounts (see page 48). However, these ties can also be used independently of the mounts. These button head ties are manufactured with a pilot bushing which, when used with the saddle mounts, prevents chafing of the tie. The saddle mount is snapped onto the tie, and the mount and tie assembly can be pre-installed onto a frame or panel.

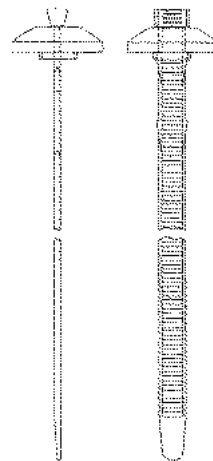

Button Head Ties with Retainers							
HellermannTyton Part No.	Material/Color	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
BT120LD0HIRK2	High Impact, Nylon 6/6, Black	120	4-5/16" (110.5)	15" (381.0)	.30" (7.6)	50	TWT2, T150, MK6PN, MK9
BT120LLD0HIRK2		120	5-7/8" (146.9)	20" (508.0)	.30" (7.6)	50	