


## Screw Mount Ties

One-piece, all plastic ties for quick, simple cable mounting. Bundling and mounting are done with one unit.



U.S. Patent Numbers 3,127,648 - 3,486,201

Screw Mount Ties							
HellermannTyton Part No.	Mounting	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T18MR9C2 T18MR9M4	#4 screw	18	3/4" (19.0)	4-1/4" (107.9)	.10" (2.5)	100 1000	TWT1, MK3P, MK7, MK7P, MK9
T30MR9C2 T30MR9M4	#8 screw	30	1-1/4" (31.7)	6-1/4" (158.7)	.14" (3.6)	100 1000	
T50MR9C2 T50MR9M4	#10 screw	50	1-3/4" (44.4)	8-1/2" (215.9)	.18" (4.6)	100 1000	TWT1, MK3P, MK6PN, MK7, MK7P, MK9
T50MRT9C2 T50MRT9M4	#6-32 tap thru screw	50	1-3/4" (44.4)	8-1/2" (215.9)	.18" (4.6)	100 1000	
T50MIT9C2 T50MIT9M4	#10 screw	50	3" (76.2)	11-3/4" (298.5)	.18" (4.6)	100 1000	
T50ML9C2 T50ML9M4	#10 screw	50	4" (101.6)	16" (406.4)	.18" (4.6)	100 1000	
T120MR9K2 T120MR9H4	#1/4" screw	120	4" (101.6)	16-1/4" (412.7)	.30" (7.6)	50 500	TWT2, MK6PN, MK9

Ties listed above are natural. Black colored cable ties are also available in nearly every size. Insert a "0" instead of "9" in the part number. Other colors may be available. See color chart on page 10.

## Push Mount Ties



Push Mount Ties								
HellermannTyton Part No.	Mounting Hole Dia. In. (mm.)	Max Panel Thickness In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T30RSF9C2 T30RSF9M4	.250" (6.35) min. to .280" (7.11) max.	.093" (2.36)	30	1-1/4" (31.7)	6-1/2" (165.1)	.14" (3.6)	100 1000	TWT1, MK3P, MK7, MK7P, MK9
T50RSF9C2 T50RSF9M4	.187" (4.76) min. to .220" (5.56) max.	.140" (3.56)	50	1-3/4" (44.4)	8-1/2" (215.9)	.18" (4.6)	100 1000	

Ties listed above are natural. Black colored cable ties are also available in nearly every size. Insert a "0" instead of "9" in the part number. Other colors may be available. See color chart on page 10.

## Wing Push Mount Ties




Wing Push Mount Ties								
HellermannTyton Part No.	Mounting Hole Dia. In. (mm.)	Panel Thickness In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T18RWPM9C2 T18RWPM9M4	.187" (4.76) min. to .220" (5.56) max.	.060" (1.5) to .125" (3.2)	18	.875" (22.2)	4.5" (111.5)	.098" (2.5)	100 1000	TWT1, MK3P, MK7, MK7P, MK9
111-85469	.240" (6.1) min. to .256" (6.5) max.	.032" (.8) to .098" (2.5)	50	1.34" (34)	6.5" (165)	.181" (4.6)	1000	
T50SL7.NN6P	.240" (6.1) min. to .256" (6.5) max.	.032" (.8) to .118" (3.0)	50	1.97" (50)	8.03" (204)	.181" (4.6)	1000	

Ties listed above are natural. Black colored cable ties are also available in nearly every size. Insert a "0" instead of "9" in the part number. Other colors may be available. See color chart on page 10.

## Ladder Style Push Mount Ties


Unique ladder style design eliminates the need for various sizes of clamps. Wings on the side of the tie provide stabilization.

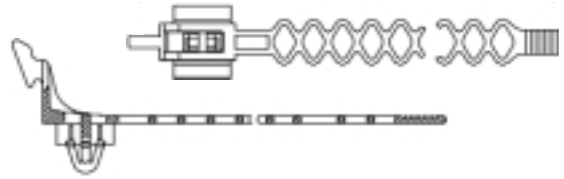

Ladder Style Push Mount Ties									
HellermannTyton Part No.	Material/Color	Mounting Hole Dia. In. (mm.)	Max Panel Thickness In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
FBS100	Nylon 6/6, Black	.250" (6.35)	.118" (3.0)	N/A	7/8" (23.0)	4-1/2" (114)	.40" (10.0)	500	N/A
FBS140		min. to .264" (6.7)	.118" (3.0)	N/A	1-1/2" (38.0)	6-1/4" (158)	.40" (10.0)	500	
FBS185		max.	.118" (3.0)	N/A	2" (50.0)	8" (201)	.40" (10.0)	500	

## Fir Tree Push Mount Ties


Fir tree design grips to the inside of a hole. Can be used on sheet metal, wood, and cast iron.



Fir Tree Push Mount Ties									
HellermannTyton Part No.	Material/Color	Mounting Hole Diameter In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools	
T50RTM250HSM4	Nylon 6/6, Heat Stabilized, Black	.246" (6.25) min. to .276" (7.0) max.	50	2" (50.8)	8.39" (213.1)	.18" (4.6)	1000	TWT1, MK3P, MK6PN, MK7, MK7P, MK9	

## Domed Fir Tree Mount Ties

Domed head tie provides a tight, rattle-free installation. The dome also acts as a seal to keep out dust and liquid.



Domed Fir Tree Mount Ties									
HellermannTyton Part No.	Material/Color	Mounting Hole Dia. In. (mm.)	Max Panel Thickness In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T50SDP6	Nylon 6/6, Heat Stabilized, Black	1/4" (6.35)	.260" (6.5) min. to .276" (7.0) max.	50	1-1/4" (31)	6-1/2" (165)	.20" (5.0)	500	TWT1, MK3P, MK6PN, MK7, MK7P, MK9

## Domed Push Mount Ties


Domed head tie provides a tight, rattle-free installation.



Domed Push Mount Ties									
HellermannTyton Part No.	Material/Color	Mounting Hole Dia. In. (mm.)	Max Panel Thickness In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T50SD6	Nylon 6/6, Heat Stabilized, Black	.25" (6.3) to .30" (7.5)	.070" (1.8)	50	1-1/4" (31)	6-1/4" (160)	.20" (5.0)	500	TWT1, MK3P, MK7, MK7P, MK9

## Center Mount, Domed Push Mount Ties

Centers the mount on all bundle diameters. Mount is molded in a stationary position for easy assembly.


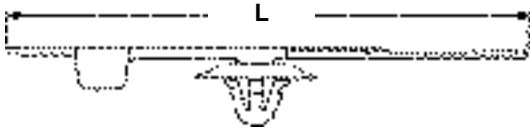


### Center Mount, Domed Push Mount Ties

HellermannTyton Part No.	Material/Color	Mounting Hole Dia. In. (mm.)	Max Panel Thickness In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T50RSP	Nylon 6/6, Heat Stabilized, Black	.24" (6.0) to .26" (6.5)	.05" (1.3)	50	1-3/4" (45.0)	7-1/2" (190)	.18" (4.7)	1000	N/A

## Stud Mount Ties

The stud mount tie is a one-piece cable tie, made from black, high impact nylon 6/6. Bundling and mounting are accomplished with one unit. The stud mount tie is designed for use on the 1/4"-20 UNC thread of a stud or the exposed threads of a machine screw.

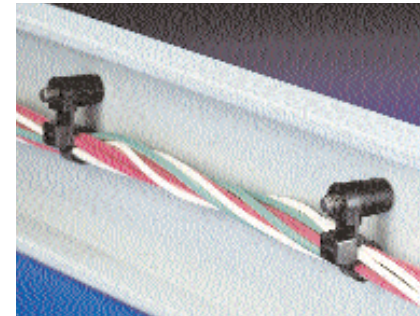


### Stud Mount Ties

HellermannTyton Part No.	Material/Color	Recommended Stud Size	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T120RSM0HIRK2	Nylon 6/6, High Impact, Black	1/4" - 20 UNC	120	4" (101.6)	16" (406.4)	.30" (7.6)	50	TWT2, MK6PN, MK9

## Ladder Style Stud Mount Ties

Ladder style tie mounts easily onto #10-24" (5 mm) stud. Unique latch allows for easy re-entry to bundles.

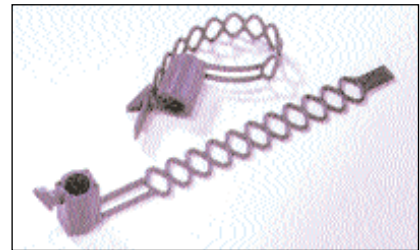


### Ladder Style Stud Mount Ties

HellermannTyton Part No.	Material/Color	Recommended Stud Size In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
FBB100	Nylon 6/6, Black	#10-24" (5.0)	N/A	7/8" (23.0)	4.0" (100)	.40" (10.0)	500	N/A
FBB140				1-1/2" (38.0)	5-5/8" (142)	.40" (10.0)	500	
FBB185				2" (50.0)	7-1/4" (185)	.40" (10.0)	500	

## Flexible Head Stud Mount Ties

Flexible head wraps around cable bundle for easy installation. Tie mounts onto #10-24" (5mm) stud.

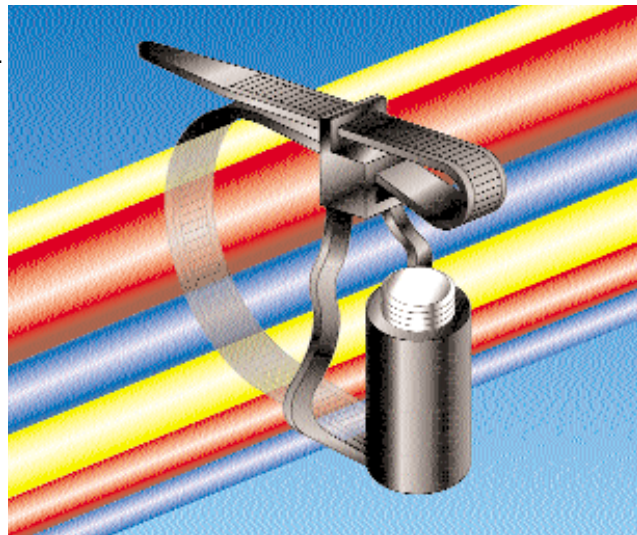

### Flexible Head Stud Mount Ties

HellermannTyton Part No.	Material/Color	Recommended Stud Size In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
T50RS5	Nylon 6/6, Black	#10-24" (5.0)	50	1-1/2" (40)	7-1/2" (190)	.18" (4.6)	100	N/A

## Dual Clamp Ties

HellermannTyton's dual clamp ties are designed to provide parallel spacing between hoses, wires, cables and tubing, protecting them from abrasion. These ties have an optional mounting hole for securing bundles along the chassis of trucks, trailers, and automobiles. The unique, one-piece design features the dual head centered on the strap.



*U.S. Patent Number 5,966,781*

### Dual Clamp Ties

HellermannTyton Part No.	Material/Color	Recommended Stud Size In. (mm.)	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
DCT90HIRK2 DCT90HIRC2	Nylon 6/6, High Impact, Black	1/4" (6.35)	150	1.3" each side (33.02)	12.9" (327.66)	.50" (12.7)	50 100	MK9 or T250
DCT110HIRK2 DCT110HIRC2		1/4" (6.35)	150	2.3" each side (58.42)	19.2" (487.68)	.50" (12.7)	50 100	