

Parallel Entry Ties

The parallel entry tie features a very low profile head, which enables the installed tie to lie flat on the bundle. Its sleek design enhances safety and fulfills the requirements of many diverse applications. The parallel entry tie features outside serrations to allow the smooth side of the tie to rest on a bundle, reducing any potential of wear due to abrasion from vibrations or movement.

The parallel entry tie also offers an optional custom designed feature for foam applications, such as playground equipment. With child safety in mind, the patented retainer bumps on the strap allow the tie to grip into foam padded equipment eliminating slippage. The retainers also contain the tail of the tie eliminating the need to cut any excess material. This feature eliminates the potential for any sharp edges. Only a smooth surface is evident. The "PER" designation in the part number indicates the retainer feature.



Retainer (PER) Version



Retainer



No Retainer


Parallel Entry Ties

HellermannTyton Part No. *	Description	Material/Color	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	HellermannTyton Installation Tools
PE130R_UVC2	No Retainer	Nylon 6/6, UV	130	4.875" (123.83)	16.25" (412.75)	.358" (9.09)	100	TWT2, T150, T250, MK6PN, MK9
PER130R_UVC2	Retainer	Nylon 6/6, UV	130	4.875" (123.83)	16.25" (412.75)	.358" (9.09)	100	
PE130I_UVC2	No Retainer	Nylon 6/6, UV	130	6.25" (158.75)	21" (533.40)	.358" (9.09)	100	

* Part number does not designate color. Many unique colors which match manufacturers' playground equipment foam are available. Contact HellermannTyton for more information.

Outside Serrated Ties

Developed for specific applications where thin walled or soft insulation is used (such as in aircraft, trains etc.) and for applications that are very sensitive to the amount of force applied to the cable (telecommunications etc.). The outside serrated cable ties offer a wide variety of tensile strength options.

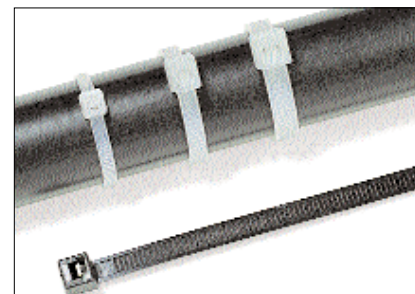

Outside Serrated Ties

Hellermann Tyton Part No.*	Material/Color	Min. Tensile Strength (lbs.)	Maximum Bundle Dia. In. (mm.)	Approx. Length In. (mm.)	Approx. Width In. (mm.)	Pkg. Qty.	Hellermann Tyton Installation Tools
LK0XHS	Heat Stabilized, Nylon 6/6, Black	18	5/8" (16)	4" (100)	.09" (2.3)	200	TWT1, MK3P, MK7, MK7P, MK9
LK0BHS		30	1-3/4" (45)	7-7/8" (200)	.14" (3.5)	100	
LK2CHS		50	2" (50)	7-7/8" (200)	.18" (4.6)	100	
LK2MHS		50	2" (50)	10-1/4" (260)	.18" (4.6)	100	
LK4HS		120	4-1/4" (108)	15-3/4" (390)	.30" (7.6)	100	TWT2, MK6PN, MK9

* Other colors available. Subject to minimums, custom terms, and lead times. Contact HellermannTyton for more information.