

PARAMOUNT

-> Audio Visual Mounting Solutions









PARAMOUNT

Audio Visual Mounting Solutions

The Paramount™ line by Peerless-AV® is the balance of form and function. To achieve the ultimate viewing experience, Paramount display mounting solutions deliver low profiles with an ease of installation and a stylish offering of durable design. Movement and versatile functionality are the hallmark attributes that make the Paramount comprehensive line of mounts an attractive solution for creating comfortable viewing angles.



submitted to rigorous safety testing, including tests for strength and "pull out" to a minimum of four times the stated load capacity.

Peerless-AV's mounts are also RoHS compliant, which stands for the Restriction of Hazardous Substances.

Through the restriction of six hazardous materials

in electrical and electronic products, Peerless-AV

provides a safe environment for the consumer.

This series of mounts has passed the approval

process for Underwriters Laboratories (UL), promoting safe living and working environments by the application of safety science and hazard-based

safety engineering. Paramount mounts have been
















Key Features and Benefits



Open Wall Plate



Low-Profile Design



Easy-Glide™ Design



Hook-and-Hang™ System



Locking Tilt



Integrated Cable Management




Flat & Tilt Wall Mounts

The Paramount™ series of flat and tilt wall mounts are simple and easy to install. The low-profile design positions the display close to the wall, complementing the latest displays on the market. The Hook-and-Hang™ system offers easy, one-person installation of the display, while the Easy-Glide™ adaptors hook onto the wall plate for a quick, simple, and secure installation. Achieve perfect positioning of the display with the side-to-side adjustment feature after installation. A ratcheting handle provides locking tilt capability for quick adjustments to the amount of tilt, reducing glare and optimizing the viewing angle.





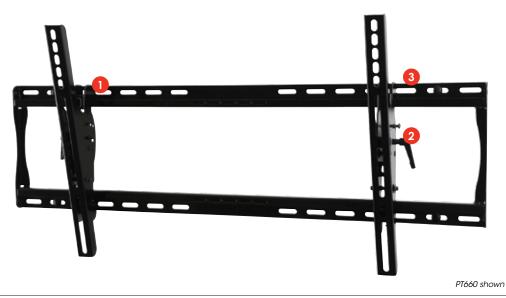

1. HOOK-AND-HANG™
INSTALLATION
Display is easily installed

by a single person

2. LOCKING TILT
Lock the display at any
angle with the ratcheting
handle

3. HORIZONTAL ADJUSTMENT

Side-to-side adjustment allows for perfect display positioning [after installation]


FLAT

* Additional VESA® 200 x 100mm mounting pattern with ACC2X1 Adaptor Plate Accessory

** Additional VESA® mounting patterns up to 400 x 400mm with ACC4X4 Adaptor Plate Accessory







| | | osDpd | os 7 pd | os 7 pd |
|--|--|--|--|--|
| PF630 | PF632 | PF640 | PF650 | PF660 |
| Display Size | Display Size | Display Size | Display Size | Display Size |
| 10" to 29" | 22" to 40" | 32" to 46" | 39" to 75" | 39" to 90" |
| Max Load | Max Load | Max Load | Max Load | Max Load |
| 50lb (23kg) | 80lb (36kg) | 100lb (45kg) | 150lb (68kg) | 200lb (91kg) |
| VESA® Pattern 75 and 100mm* | VESA® Pattern 100, 200 x 100 and 200 x 200mm** | Mounting Pattern up to 450 x 305mm (17.72" x 12.01") | Mounting Pattern up to 742 x 405mm (29.23" x 15.95") | Mounting Pattern up to 825 x 405mm (32.48" x 15.95") |
| Distance From Wall 0.64" (16mm) | Distance From Wall | Distance From Wall | Distance From Wall | Distance From Wall |
| | 0.64" (16mm) | 1.26" (32mm) | 1.26" (32mm) | 1.26" (32mm) |
| Tilt | Tilt | Tilt | Tilt | Tilt |
| — | — | — | — | — |
| Metal Stud Accessory ACC215 | Metal Stud Accessory ACC215 | Metal Stud Accessory ACC415 | Metal Stud Accessory ACC415 | Metal Stud Accessory ACC415 |

• Slim design positions the display only 0.64" (16mm) from the wall

 Low-profile design creates an aesthetically appealing loo Design is UL listed and tested to four times stated load capacity



TILT









| | | os /pd | os /pd | os /pd |
|---|---|--|---|---|
| PT630 | PT632 | PT640 | PT650 | PT660 |
| Display Size 10" to 29" | Display Size 22" to 40" | Display Size 32" to 46" | Display Size 39" to 75" | Display Size 39" to 90" |
| Max Load 50lb (23kg) | Max Load 80lb (36kg) | Max Load 100lb (45kg) | Max Load 150lb (68kg) | Max Load 200lb (91kg) |
| VESA® Pattern 75 and 100mm* | VESA® Pattern 100, 200 x 100 and 200 x 200mm** | Mounting Pattern up to 450 x 305mm (17.72" x 12.01") | Mounting Pattern up to 750 x 405mm (29.52" x 15.95") | Mounting Pattern up to 832 x 405mm (32.75" x 15.95") |
| Distance From Wall 2.01"-2.98" (51-76mm) | Distance From Wall 2.01"-3.78" (51-96mm) | Distance From Wall 2.63"-4.74" (67-120mm) | Distance From Wall 2.63"-5.50" (67-139mm) | Distance From Wall 2.63"-5.50" (67-139mm) |
| Tilt +15°/-5° | Tilt +15°/-5° | Tilt +15°/-5° | Tilt +15°/-5° | Tilt +15°/-5° |
| Metal Stud Accessory ACC215 | Metal Stud Accessory ACC215 | Metal Stud Accessory ACC415 | Metal Stud Accessory ACC415 | Metal Stud Accessory ACC415 |


 Tilt angle locks into place with simple tightening of handle Included IncreLok[™] feature offers fixed tilt lock in 5° increments Design is UL listed and tested to four times stated load capacity.

Pivoting & Articulating Wall Mounts

The Paramount™ series of pivot and articulating wall mounts provide versatile and multi-functional features. The arm allows the display to be fully extended or retracted from the wall for an improved viewing angle. Integrated cable management protects, contains and conceals cables for a clean installation. One-Touch™ tilt technology of ±15° vertical tilt movement, ±5° roll for post-installation leveling and ±90° pivoting means the display will be perfectly positioned for the ideal viewing angle.





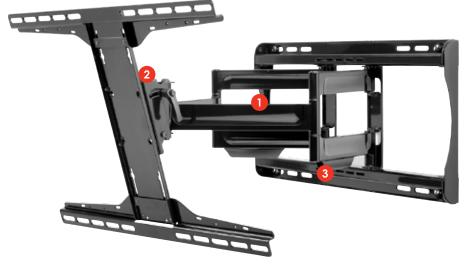

PA762 shown

1. EXTENDS UP TO 21.32" (542mm) Offers the perfect viewing angle

2. HOOK-AND-HANG™ INSTALLATION Display is easily installed

by a single person

MANAGEMENT Protects, contains and conceals cables

PARAMOUN

3. INTEGRATED CABLE for a clean, professional installation

* Additional VESA® 200 x 100mm mounting pattern with ACC2X1 Adaptor Plate Accessory

os Dpd

** Additional VESA® mounting patterns up to 400 x 400mm with ACC4X4 Adaptor Plate Accessory



| PP730 | PP740 |
|---|---|
| Display Size | Display Size |
| 10" to 29" | 22" to 40" |
| Max Load | Max Load |
| 25lb (11kg) | 80lb (36kg) |
| VESA® Pattern 75 and 100mm* | VESA® Pattern 100, 200 x 100 and 200 x 200mm** |
| Distance From Wall 2.75"-7.40" (70-188mm) | Distance From Wall 2.76"-7.43" (70-189mm) |
| Tilt Swivel Roll | Tilt Swivel Roll |
| ±15° ±90° ±5° | +15°/-5° ±90° ±5° |
| Metal Stud Accessory | Metal Stud Accessory |
| WSP700/WSP701 | WSP700/WSP701 |

• Extends, turns and tilts



os 7pd

ARTICULATING









| - | |
|---|--|
| 1 | |

| • | | - | |
|---|--|---|---|
| PA730 | PA740 | PA746 | PA762 |
| Display Size | Display Size | Display Size | Display Size |
| 10" to 29" | 22" to 40" | 32" to 50" | 39" to 90" |
| Max Load | Max Load | Max Load | Max Load |
| 25lb (11kg) | 80lb (36kg) | 80lb (36kg) | 150lb (68kg) |
| VESA® Pattern 75 and 100mm* | VESA® Pattern 100, 200 x 100 and 200 x 200mm** | VESA® Pattern 100, 200 x 100, 200 x 200, 300 x 200, 300 x 300, 400 x 300 and 400 x 400mm | Mounting Pattern up to 600 x 400mm (23.62" x 15.75") |
| Distance From Wall 2.73"-14.85" (69-377mm) | Distance From Wall 2.80"-14.91" (71-379mm) | Distance From Wall 2.81"-15.08" (71-383mm) | Distance From Wall 3.00"-21.32" (76-542mm) |
| Tilt Swivel Roll | Tilt Swivel Roll | Tilt Swivel Roll | Tilt Swivel Roll |
| ±15° ±90° ±5° | +15°/-5° ±90° ±5° | +15°/-5° ±90° ±5° | +15°/-5° ±90° ±5° |
| Metal Stud Accessory | Metal Stud Accessory | Metal Stud Accessory | Metal Stud Accessory |
| WSP700/WSP701 | WSP700/WSP701 | WSP700/WSP701 | — |

retract your display for the perfect viewing angle

Design is UL listed and tested to four times stated load capacity

The I-Shaped Adaptor plate's innovative design helps avoid blocking connections on back of display

As a manufacturer and innovator of a wide range of audio-visual solutions and leading-edge technology, our commitment is to always Get It Right. From well-designed and quality-built products to unsurpassed customer service, Getting It Right is not a slogan. It is our guiding principle. Why? Because we know that it's yours, too.





peerless-av.com 800-865-2112