

JVC

4K Memory Card Camera Recorder

GY-HC550 GY-HC500

CONNECTED CAM™



Photo shows GY-HC550 with optional microphone.

SRT
SECURE
RELIABLE
TRANSPORT

ZX

4K

HDR
High Dynamic Range

ProRes

MPEG-2

SD

XC


Ready for Various Recording Needs

H.265/HEVC
StreamingApple ProRes 422
RecordingMulti-Purpose
Slot for
ExpandabilityH.265/
HEVCKA-EN200G: H.265/HEVC
Streaming Adapter

KA-EN200G

With the optional KA-EN200G H.265/HEVC Streaming Adapter attached, high-quality and efficient IP video transmission is possible.

- H.265 compression produces similar or better image quality than H.264 at 50% of bitrate.
- Supports contribution quality of 4:2:2 10-bit HEVC encoding.
- Encodes HDR video with HLG or J-LOG Gamma LUTs.
- Supports UDP, Zixi and SRT streaming protocols.

SSD
Solid State DriveKA-MC100G: SSD Media
Adapter

SSD Media (not included)



KA-MC100G

You can use a large-capacity, readily-available SSD (SATA M.2 SSD Type2280)* as recording media. Just insert it in the optional KA-MC100G and attach to the camera. SSD media delivers excellent sequential read speed to tackle professional workload and its high-capacity extends recording time of 4K UHD video. High-speed transfer of huge amounts of recorded footage is also available.

* Approved SSD media should be used. Refer to the JVC website for detailed information.

ProRes

4K UHD/HD 60p/50p ProRes 422 10-bit Recording


By using the SSD media, ProRes 422 recording becomes possible for attention-grabbing 4K/HD 60p/50p image creation. ProRes 422 offers virtually lossless intra-frame compression, which speeds up post-production. Footage is recorded in native file formats that are understood by most major editing applications without transcoding. This is helpful for efficient workflow of editing and post process. The 4:2:2 format also provides richer color information and 10-bit recording delivers rich gradations—a definite advantage for grading work after recording.

Backup Recording to SSD

Backup recording to record ordinary Rec Start/Stop-controlled footage in the SD Card of slot A while recording all data on the SSD even when slot A is paused.

■ IFB and Return Video over IP (RTSP/RTP, Zixi [GY-HC550], Icecast (Audio))

The GY-HC550/HC500 features built-in IFB and Return Video decoders capable of receiving the H.264 stream over the Internet via RTSP "Pull" protocol (Return Video) and Icecast streams for the IFB. The camera can receive either IFB or Return Video, not both simultaneously. Return Video is displayed in the viewfinder and LCD and output via SDI when the pre-assigned button "Return Video" is pressed once. The second press would return the LCD/EVF/SDI to the live video output. The HDMI output does not switch to Return Video and outputs live video all the time.

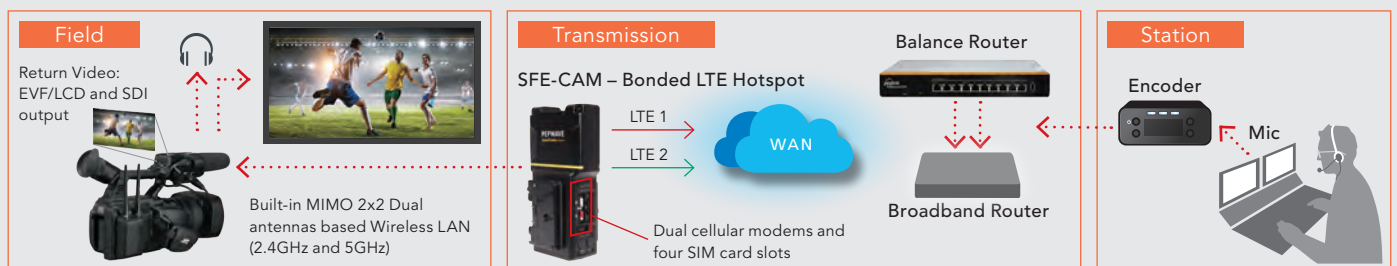

SFE-CAM is a bonded cellular hotspot that connects interactively to multiple GY-HC550/HC500 camcorders and features Peplink's patented SpeedFusion™ technology. SFE-CAM bonds multiple cellular and wireless LAN connections enabling the user to send digital video at greater speeds than you could with a single modem. Provided with dual cellular modems with redundant SIM slots and dual band Wireless LAN, you can use up to four different providers for bandwidth bonding.



Ready for Quality, Reliable Streaming

Variety of
QoS
Technologies

Zixi

SRT

SMPTE 2022-1

SRT
SECURE
RELIABLE
TRANSPORT

Various Protocols for QoS including SRT, Zixi*, and SMPTE 2022-1

For quality, reliable streaming, the CONNECTED CAM camcorders feature various QoS (Quality of Service) capabilities including Zixi, SRT and SMPTE 2022-1. Forward error correction (FEC), automatic repeat request (ARQ), and adaptive bitrate control are supported to ensure error-free video delivery in packet loss environments such as when streaming over cellular networks.




* Zixi is not available with GY-HC500. For GY-HC550, Zixi and SRT protocols do not co-exist as it requires exclusive firmware to install. Choose either protocol to use when installing initially.

SRT – Powerful Video Transport Protocol

SRT (Secure Reliable Transport) is a video transport protocol that optimizes video streaming performance even under unstable networks. With ARQ and FEC support, SRT brings together encryption, packet loss recovery, and jitter prevention to preserve the integrity and quality of video streaming.

SRT Stream ID for Added Security

Stream ID protects a video channel from unauthorized access. The SRT decoder only accepts streams with embedded, encoder-specified Stream IDs and all other streams are ignored. To receive multiple streams differentiated by unique Stream IDs, only a single port is necessary so that the additional security is assured when delivering video over public networks.

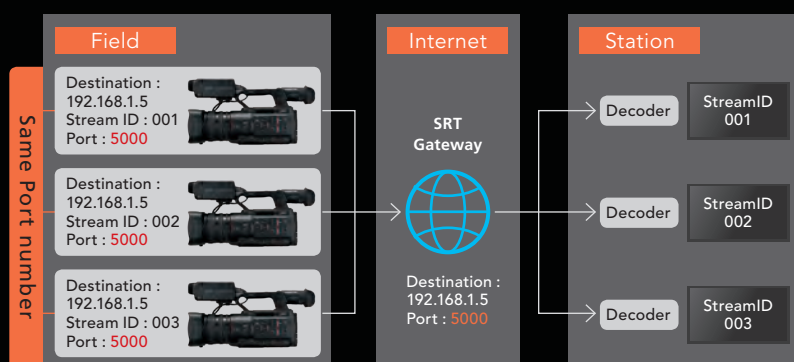

■ Broadcast Info Overlay on HD Video and Streaming

GY-HC550



Real-time broadcast information overlays are available for HD recorded video or streamed video without an external CG or production switcher.

- This feature is not available in 4K or SD mode.
- Overlay designs can be created in various language characters using JVC's SDP Generator (free software).

■ IP Remote Control with Viewing

Various camera operations can be controlled via wireless/wired LAN from a smartphone, tablet and PC.

■ Auto/Progressive FTP

During shooting, recorded video clips are automatically uploaded to the server.



■ NTP (Network Time Protocol)

The combination of GY-HC550/HC500 and KM-IP6000/IP4100 provides an affordable multi-camera live production solution with Network Time Protocol. Suitable for compact live production and streaming studios to deliver live events such as concerts, sports, ceremonies, and conferences.

■ VITC (Vertical Interval Time Code)

Can use the industry-standard TC, compatible with Haivision, VITEC, and other decoders.

■ Built-in GPS GY-HC550

Enables location information to be recorded or streamed as metadata.

Go Live Streaming on the Social Network!

The GY-HC550/HC500 offers the "Easy Setup" function for YouTube Live and Facebook Live via simple step-by-step menu operations.

Easy Setup for YouTube Live

You can select scheduled or immediate streaming (Schedule On/Off setting) for YouTube Live.


Easy Setup for Facebook Live

Just follow the camcorder's menu settings and you can easily get ready to stream over the Facebook Live.

RTMPS Support (Real Time Message Protocol over Secure Sockets Layer)


Facebook Live requires all encoders to use the RTMPS protocol. Count on the GY-HC550/HC500 that supports more resolution and bitrate formats of the RTMPS protocol.

JVC is a member of "Facebook Live Solution Partners".
<https://www.facebook.com/formedia/solutions/facebook-live>

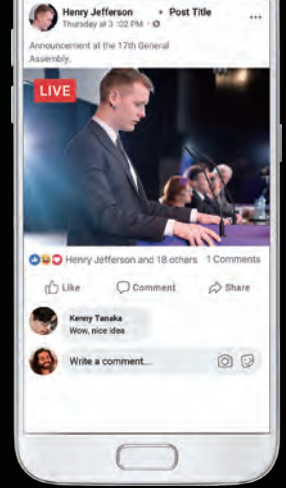

Vertical and Square Streaming for the Social Network

Vertical or square angle of view can be selected for streaming to the applicable social network services.

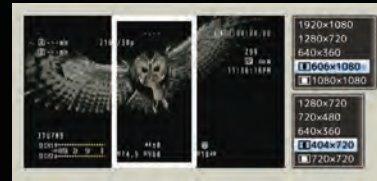

White guidelines will appear on the LCD and viewfinder.



Streaming Format Availability

Conditions: [1] Record Format:H.264, [2] without overlay and timestamp, [3] without KA-EN200G

Resolution	1920x1080																606x1080, 1080x1080	1280x720																											
Frame Rate	60p, 50p (Not available in MPEG2 recording)								60i, 50i				30p, 25p				60p, 50p, 30p, 25p (Not available in MPEG2 recording)	60p, 50p								30p, 25p																			
Type	MPEG2-TS/UDP	MPEG2-TS/TCP	MPEG2-TS/RTSP	Zixi	SRT (FEC Off)	SRT (FEC On)	RTMP	RTMPS	Facebook Live (RTMPS)	YouTube Live (RTMP)	MPEG2-TS/UDP	MPEG2-TS/TCP	MPEG2-TS/RTSP	RTSP	Zixi	SRT	RTMP	RTMPS	Facebook Live (RTMPS)	YouTube Live (RTMP)	RTMP	RTMPS	MPEG2-TS/UDP	MPEG2-TS/TCP	MPEG2-TS/RTSP	RTSP	Zixi	SRT	RTMP	RTMPS	Facebook Live (RTMPS)	YouTube Live (RTMP)	MPEG2-TS/UDP	MPEG2-TS/TCP	MPEG2-TS/RTSP	RTSP	Zixi	SRT	RTMP	RTMPS	Facebook Live (RTMPS)	YouTube Live (RTMP)			
Bitrate																																													
24Mbps	●																						●																						
20Mbps	●	●									●												●																						
16Mbps	●	●	●								●	●											●	●		●																			
12Mbps	●	●	●	●							●	●	●										●	●	●	●																			
8Mbps	●	●	●	●	●						●	●	●	●									●	●	●	●	●																		
5Mbps	●	●	●	●	●	●				●	●	●	●	●	●								●	●	●	●	●	●																	
3Mbps	●	●	●	●	●	●	●			●	●	●	●	●	●	●							●	●	●	●	●	●	●																
1.5Mbps	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●						●	●	●	●	●	●	●	●															
0.8Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.3Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Resolution	404x720, 720x720	720x480 or 720x576	640x360											
Frame Rate	60p, 50p (Not available in MPEG2 recording)	60i, 50i	60p, 50p						30p, 25p					
Type	RTMP	RTMPS	Facebook Live (RTMPS)	YouTube Live (RTMPS)	MPEG2-TS/UDP	MPEG2-TS/TCP	MPEG2-TS/RTSP	Zixi	SRT	RTMP	RTMPS	Facebook Live (RTMPS)	YouTube Live (RTMPS)	
Bitrate														
24Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
20Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
16Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
12Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
8Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
1.5Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.8Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●
0.3Mbps	●	●	●	●	●	●	●	●	●	●	●	●	●	●

KA-EN200G: H.265/HEVC Streaming Format

Resolution	1920x1080						1280x720					
Frame Rate	60p, 50p			30p, 25p			60p, 50p			30p, 25p		
Color depth, Sampling	4:2:2, 10-bit	4:2:0, 8-bit	4:2:2, 10-bit	4:2:0, 8-bit	4:2:2, 10-bit	4:2:0, 8-bit	4:2:2, 10-bit	4:2:0, 8-bit	4:2:2, 10-bit	4:2:0, 8-bit	4:2:2, 10-bit	4:2:0, 8-bit
Type	MPEG2-TS/UDP	Zixi	SRT	MPEG2-TS/UDP	Zixi	SRT	MPEG2-TS/UDP	Zixi	SRT	MPEG2-TS/UDP	Zixi	SRT
Bitrate												
24Mbps	●	●	●	●	●	●	●	●	●	●	●	●
20Mbps	●	●	●	●	●	●	●	●	●	●	●	●
16Mbps	●	●	●	●	●	●	●	●	●	●	●	●
12Mbps	●	●	●	●	●	●	●	●	●	●	●	●
8Mbps	●	●	●	●	●	●	●	●	●	●	●	●
5Mbps	●	●	●	●	●	●	●	●	●	●	●	●
3Mbps	●	●	●	●	●	●	●	●	●	●	●	●
1.5Mbps	●	●	●	●	●	●	●	●	●	●	●	●
0.8Mbps	●	●	●	●	●	●	●	●	●	●	●	●
0.3Mbps	●	●	●	●	●	●	●	●	●	●	●	●

Attention: Zixi is not available with GY-HC500. For GY-HC550, Zixi and SRT protocols do not co-exist as it requires exclusive firmware to install. Choose either protocol to use when installing initially.

1-Inch CMOS

1" CMOS 4K Image Sensor

The GY-HC550/H500 features a 1-inch CMOS 4K image sensor for uncompromised image quality. This large sensor delivers a superior dynamic range, high S/N ratio and high sensitivity (F11 at 2000lx). Details are crisp and accurate throughout the entire image plane.

20x Zoom Lens


20x Optical/40x Dynamic Zoom Lens with Manual Functions

A wide angle 20x optical zoom lens for flexible magnification. When shooting in HD mode, Dynamic Zoom combines optical zoom and pixel mapping from a 4K image sensor to create seamless and lossless 40x zoom. An optical image stabilizer and chromatic aberration correction are also available.




HDR via HLG/J-Log 1

HLG & J-Log 1 Color Gamut



J-Log 1 and Rec709+Knee Gamma

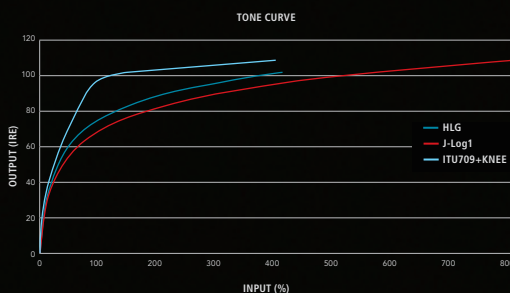

[HLG Workflow]

GY-HC550/H500 supports HLG recording which enables simple HDR workflow without color grading. Avoiding clipped highlights or shadows, images are more realistic and vibrant. BT.2020 which offers wider color gamut is also supported.

The GY-HC550/H500 is equipped with an HDR compatible HLG (Hybrid Log Gamma) mode and JVC's proprietary J-Log 1 Gamma mode. These enable high dynamic range capture of a broad color spectrum with 10-bit recording for better color grading and to avoid banding. Footage recorded in HLG mode will deliver a full HDR image when viewed on HLG-compatible monitors. The J-Log 1 mode delivers wide latitude and a high dynamic range of 800%. In the field, it's possible to record while checking the image on the camera's LCD screen or viewfinder to get a grasp of the final output.

High-Speed Recording for 1080p Slow Motion Playback

High-speed recording (1920x1080) at up to 120fps (59.94Hz)/100fps (50Hz) is available for smooth slow motion playback (up to 1/5 slow at 24p mode). It helps create artistic effects and lets you watch replays to examine sporting skills.


Extremely Practical Auto Focus and Assist Functions

The Auto Focus and Focus Assist functions provide the highly accurate, stable focusing that is essential for 4K shooting. Moreover, its broad customizability enables it to perform in a variety of shooting situations.

Face Detection: ON




Face Only AF: OFF



When the face turns away and face detection fails, focus comes into the subject in the background.

Face Only AF: ON



When face detection fails, focusing automatically switches to MF while maintaining the focus on the position of the face.

Robust Body and Excellent in Weather Resistance

Designed to work in harsh environments, its weather-resistant robust body enables image gathering in the field with confidence.




Switchable IR Shooting

IR filter can be switched disabled (Infrared ON) to increase infrared sensitivity for shooting in extremely low illuminance. The IR shooting function can be assigned to the "USER" button.

Auto Color Matrix Adjustment under LED Light

Auto Color Matrix Adjustment reproduces natural images when shooting under LED lighting in Full Auto mode.



Remote Zoom Ease

"Remote Zoom Ease" provides zoom operation sensitivity on the wired remote, similar to the zoom lever on the camcorder handle.

CONNECTED CAM STUDIO

LIVE STREAMING PRODUCTION SUITE

KM-IP6000 (6-input) / KM-IP4100 (4-input)

KM-IP6000/IP4100 Series is the centerpiece of a complete IP workflow for news, sports, worship and education. This self-contained control room features a production switcher that offers instant-replays and slow motion with an intuitive touch-screen operation.



- HD-SDI input, IP stream input, NDI input (x6 for KM-IP6000, x4 for KM-IP4100)
- Integrated JVC camcorder remote control
- Up to 1920x1080 30p/25p or 1280x720 60p/50p streaming @ 10Mbps max
- RTMP & MPEG-TS simultaneous output
- Internal character generator with templates
- 4 layers of DSK – CG/images/animations with transparency


■ Replay and Slow Motion

■ Return over IP

■ SRT Compatible

■ Multi-Camera Synchronization

Equipped with multi-camera synchronization, Network Time Protocol synchronized encoders.

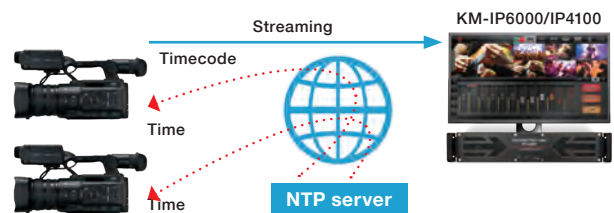

■ Zero Config Capability

Provides automatic detection of JVC camcorders within the same LAN group, and simple setting up of connections with the KM-IP6000/KM-IP4100.



RM-LP250S

RM-LP250M

IP REMOTE CONTROL PANEL

RM-LP250S (Joystick version) / RM-LP250M (Encoder version)

RM-LP250S/LP250M is an IP based remote control panel for CONNECTED CAM models (GY-HC500 Series and GY-HC900 Series). It enables versatile control of iris functions and other camera settings with ethernet connection (RJ-45).

RM-LP250S: Can control a single camera

RM-LP250M: Can control up to 3 cameras

Basic System Configurations



Controlling 3 cameras with a controller and a mixer.

Item	Model	Description	Qty
1	RM-LP250M (Encoder)	IP Remote Control Panel	1
2	GY-HC500	4K Memory Card Camera Recorder	3
3	KM-IP4100	LIVE STREAMING PRODUCTION SUITE	1
4	Monitor	(for use with KM-IP4100)	1

Item	Model	Description	Qty
5	Monitor		1
6	Microphone		1
7	Control	LAN Cable	6
8		HUB (PoE+ for RM-LP250M)	1
9	Internet Connection	Broadband Router (to connect the Internet)	

GY-HC550 / GY-HC500 Comparison

		GY-HC550	GY-HC500
Codec	MPEG-2/MXF	Yes	No
Hardware	GPS	Yes	No
	Wireless LAN 2.4G/5G	Built-in	With optional USB dongle
IP	Zixi protocol	Zixi or SRT*	No
	SRT protocol		Yes
Broadcast Overlay		Yes	No

* Select either one at initial firmware installation.



Accessories



BN-VC2128

Battery

Battery capacity: 12800mAh, 92Wh
Voltage: 7.2V



BN-VC296


Battery

Battery capacity: 9600mAh, 69Wh
Voltage: 7.2V




AA-VC20

Battery Charger



KA-EN200G

H.265/HEVC
Streaming Adapter



KA-MC100G

SSD Media Adapter
SSD media is not included.



KM-IP6000
KM-IP4100
KM-IP4000S*
*for Americas market

Live Streaming
Production Suite

Monitor is not included.



RM-LP250S

IP Remote Control Panel

Joystick version,
Control x1 camera recorder



RM-LP250M

IP Remote Control Panel

Encoder version,
Control x3 camera recorders



RM-LP100

Remote Camera
Controller



BR-DE900

ProHD Decoder



zRAMP-4

(Zixi zRAMP 4-in/4-out)

zRAMP-2

(Zixi zRAMP 2-in/2-out)

Streaming Management
Server



QAN0067-003

Microphone
for ProHD/4K
Camcorder

Specifications

GENERAL SPECIFICATIONS	Power	DC12V (AC adapter), DC7.2V (battery)	
	Power consumption	Approx. 24W (Default setting)	
	Dimensions (W x H x D)	188mm x 227mm x 437mm (with lens hood)	
	Weight	3.6kg (with lens hood and battery, without wireless LAN antenna unit)	
	Temperature	Operating: 0°C to 40°C, Storage: -20°C to 50°C	
	Humidity	Operating: 30% to 80%, Storage: Under 85%	
CAMERA	Image sensor	1" (effective) CMOS, effective number of pixels: approx 9.35 million	
	Synchronizing	Internal synchronization	
	Stabilizer	Optical image stabilizer	
	Sensitivity	F11 at 2000lx 89.9% reflectance	
	Lens	F2.8 (wide) to F4.5 (tele), f=9.43mm to 188.6mm (f=28mm to 560mm (35mm equivalent))	
	Filter diameter	82mm	
	Shutter speed	1/6 (48Hz), 1/7.5 (60Hz) to 1/10000	
	Gain	-6, -3, 0, 3, 6, 9, 12, 15, 18, 21, 24 Lolux (30, 36) dB, AGC	
	ND filter	OFF, 1/4, 1/16, 1/64	
	Viewfinder	0.4" LCOS approx 3.68M pixels Quad VGA (1280 x 960), 1280 x 720 at 16:9	
LCD monitor	3.97" LCD approx. 1.15M pixels WVGA (800 x 480), 800 x 450 at 16:9		
VIDEO/AUDIO RECORDING	Recording media	SDHC/SDXC memory card x 2	4K (150Mbps): UHS-1 U3, 4K (70Mbps)/HD (70Mbps/50Mbps): Class 10, HD (35Mbps):Class 6, SD: Class 4, Web: Class 4, High-Speed: UHS-1 U3, Exchange (U model)/MP4 (Emodel): Class 4
		SSD (Solid State Drive) Type M.2 SATA	With KA-MC100G (optional)
	Video codec	ProRes 422, MPEG-4 AVC/H.264, MPEG-2 [GY-HC550]	
	File format	QuickTime, MP4, MXF [GY-HC550]	
Audio recording	LPCM 2ch, 48kHz/24-bit/16-bit , μ-Law 2ch (Web), AAC 2ch (Exchange/MP4), Detail information is shown in Recording Formats chart below.		
LIVE VIDEO STREAMING	Protocol	MPEG2-TS/UDP, MPEG2-TS/TCP, MPEG2-TS/RTP, RTSP, Zixi, SRT, RTMP, RTMPS, Facebook Live (RTMPS), YouTube Live (RTMP)	
	Resolution and bit rate	>> Refer to "Streaming Format Availability" chart on page 3 for details.	
	Return over IP	RTSP/RTP, Zixi [GY-HC550], Icecast (Audio)	
	Audio	AAC 2ch 128Kbps (1.5Mbps over), 64Kbps (0.8Mbps under)	
INTERFACES	Video/Audio output	3G-SDI output (BNC x 1) (up to 1920 x 1080 60p 4:2:2 10-bit), HDMI output x 1 (up to 3840 x 2160 60p 4:2:2 10-bit)	
	Audio input	XLR x 2 (MIC, +48V/LINE), ø3.5mm mini jack x 1	
	Headphone	ø3.5mm mini jack x 1	
	Remote	ø2.5mm mini jack x 1	
	Time code input/output	RCA x 1	
	USB	HOST x 1 (network connection, USB 2.0)	
	Ethernet	RJ-45 x 1	
	Extended slot	KA-EN200, KA-MC100G, and for future expansion purposes	
	Wireless LAN [GY-HC550]	Built-in (2.4GHz/5GHz) MIMO with dual external antennas	
PROVIDED ACCESSORIES	Battery (BN-VC296) x 1, wireless LAN antenna x 2 [GY-HC550], AC adapter, power cable, lens hood, vent hood		

Various Codescs and Recording Formats

System	Video format	Resolution	Frame rate			Bit rate	Audio	Rec time (min.)											
4K UHD	ProRes 422 HQ	3840 x 2160	59.94p/50p/29.97p/25p/23.98p		4:2:2 10-bit	1768/1475/884/737/707Mbps	LPCM 2ch 48kHz/24bit	67/80/134/161/167		1TB SSD									
	ProRes 422					1178/983/589/492/471Mbps		101/121/201/240/251											
	ProRes 422 LT					821/684/410/342/328Mbps		144/173/288/345/359											
	QuickTime (MPEG-4.AVC/H.264)	3840 x 2160	29.97p/25p/23.98p		4:2:2 10-bit	150Mbps	LPCM 2ch 48kHz/24bit	50		64GB SD Card									
						4:2:0 8-bit		150Mbps	LPCM 2ch 48kHz/16bit		50								
70Mbps					106														
HD	ProRes 422 HQ	1920 x 1080	59.94p/50p/29.97p/25p/23.98p		4:2:2 10-bit	440/367/220/184/176Mbps	LPCM 2ch 48kHz/24bit	240/290/480/570/600		1TB SSD									
	ProRes 422					293/245/147/122/117Mbps		360/430/710/850/890											
	QuickTime (MPEG-4.AVC/H.264)	1920 x 1080	59.94p/50p/50i/29.97p/25p/23.98p		4:2:2 10-bit	70Mbps (422 XHQ)	LPCM 2ch 48kHz/24bit	105		64GB SD card									
						50Mbps (422 XHQ)		145											
						1280 x 720		59.94p/50p/50i/29.97p/25p/23.98p			50Mbps (XHQ)	147							
												1920 x 1080	59.94i/50i/29.97p/25p/23.98p		4:2:0 8-bit	35Mbps (UHQ)	207		
																	1280 x 720	59.94p/50p	
	QuickTime/MXF (MPEG-2 Long GOP) [GY-HC550]	1440 x 1080	59.94i/50i		4:2:0 8-bit	35Mbps (HQ)	LPCM 2ch 48kHz/16bit	206											
						1280 x 720		59.94p/50p											
											1440 x 1080	59.94i/50i							
														25Mbps (SP)	283				
	Exchange (U model) MP4 (E/EC model)	1920 x 1080	59.94p (U model only) / 50p (E/EC model only)		4:2:0 8-bit	12Mbps (LP)	AAC 2ch 48kHz/16bit	580											
						8Mbps (LP)		794											
	SD	QuickTime (MPEG-4.AVC/H.264)	720 x 480 (U model)	59.94i		4:2:0 8-bit	8Mbps (HQ)	LPCM 2ch 48kHz/16bit	785										
720 x 576 (E/EC model)			50i																
WEB (Proxy)	QuickTime (MPEG-4.AVC/H.264)	1280 x 720	60p/50p		4:2:0 8-bit	6Mbps (LP)	μ-law 2ch 16kHz	1040											
		720 x 480	59.94i			8Mbps (HQ)		760											
		720 x 576	50i					3Mbps (HQ)	2160										
		960 x 540	29.97p/25p/23.98p						1.2Mbps (LP)	4720									
		480 x 270	29.97p/25p/23.98p																
High-Speed	QuickTime (MPEG-4.AVC/H.264)	1920 x 1080	120fps	59.94p	4:2:2 10-bit	70Mbps (XHQ422)	LPCM 2ch 48kHz/24bit	(Deffers by setting)											
			100fps	50p		50Mbps (XHQ422)													
			120fps	59.94p/29.97p/23.98p															
			100fps	50p/25p															
			120fps	59.94p/29.97p/23.98p	4:2:0 8-bit	50Mbps (XHQ)	LPCM 2ch 48kHz/16bit												
			100fps	50p/25p															
			120fps	29.97p/23.98p															
			100fps	25p															

Product and company names mentioned here are trademarks or registered trademarks of their respective owners. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. Zixi and the Zixi logo are trademarks of Zixi LLC. The SD, SDHC and SDXC are trademarks of the SD Card Association.

Simulated pictures.Values for weight and dimensions are approximate.
E.&O.E. Design and specifications subject to change without notice.
Copyright © 2020, JVCKENWOOD Corporation. All Rights Reserved.

DISTRIBUTED BY

JVC Professional Video website

www.jvc.ca